

GSD1000G—GE Built-In Dishwasher

Built-In Dishwasher Dimensions (in inches)

Rough-In Installation Information (in inches)

Wood Insert Cut-Out Dimensions (in inches)

Door insert

Access insert

В

А

18-7/8"

Models/Kits

GE Models

GPF325 Kit

A

С

С

3-11/16"


В

23-9/16"

Panel

Thickness

1/4"



Countertop This wall area must be free of -90 90° pipes or wires 24" MIN. Electrical wiring is 3" from cabinet Hot water Electrical 34-1/2±1/4" Underside of countertop to floor line on wiring on left right Plumbing and electrical service must enter inside shaded area 19" MIN. from wal 24" From White (neutral) Ground Black (line) 24" MIN.

Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Electrical Rating

Voltage AC12	20
Hertz6	60
Total connected load amperage6	.2
Calrod® heater watts	0
For use on adequately wired 120-volt, 15-amp	
circuit having 2-wire service with a separate	
ground wire. This appliance must be grounded	
for safe operation.	
•	

For answers to your Monogram,[®] GE Profile[™] or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center[®] service, 800.626.2000.




120 .60 6.2 500 For

Specification Revised 5/06 350394



GSD1000G—GE Built-In Dishwasher

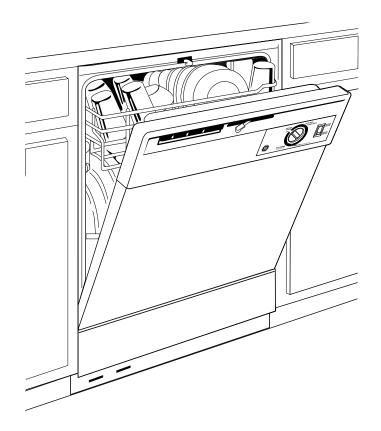

Features and Benefits

- Standard Wash System with Two Wash Levels
- Dial Controls
- 4 Cycle Selections: Heavy Wash, Normal Wash (Dial), Short Wash, Plate Warmer and Rinse Only (Dial)
- 2 Options including HotStart[™]
- Standard Upper Rack
- Deluxe Lower Rack
- Rinse Aid Dispenser
- Standard Sound Insulation Package
- Model GSD1000GWW White on white