




**GE Appliances**

## GXSV10C - GE SmartWater™ Dual Stage Drinking Water Filter

### Installation Information (in inches)

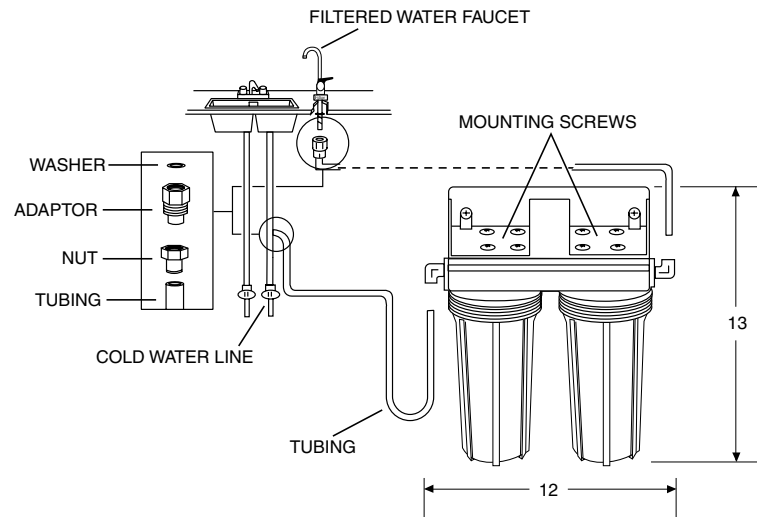

**Note:** Can be installed undercounter (as shown), in basement, or other convenient location. See installation instructions packed with product for complete details.

### Replacement Filters

Call GE SmartWater™ Service toll-free 800.952.5039 to order replacement filters.

### Water Test Kit

To order a water test kit, call 800.626.2000.

### Warranty Information

**Full One-Year Warranty** – (parts and labor at no additional charge) applies to entire unit, excludes filters.

**Limited One-Year Warranty** – parts and labor at no additional charge, (does not include service trip) applies to entire unit, excludes filters.

See written warranty for details.

**Caution:** Do not use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before or after system. System certified for cysts reduction may be used on disinfected water that may contain filterable cysts.



For answers to your Monogram®,  
GE Profile Performance Series™,  
GE Profile™ or GE appliance questions, call  
GE Answer Center® service, 800.626.2000.

**SPECTRUM**  
LABS INC

The GE SmartWater™ Filtration System has been quality tested and certified by an independent laboratory, Spectrum Labs, Inc.

The GE SmartWater™ Filtration System is tested and certified to ANSI/NSF Standard 42 for particulate reduction Class I, chlorine reduction Class I and taste and odor reduction.

The GNUL30B is tested and certified to ANSI/NSF Standard 53 for cysts, turbidity and lead reduction


### NSF Approved

NSF is the most highly recognized independent testing institution in the water treatment industry. NSF inspects our manufacturing facilities, structurally tests our product, tests our product to make sure nothing harmful is added to the water and certifies our product performance as specified on the performance data sheet (inside the product box).



**GE Appliances**

## **GXSV10C - GE SmartWater™ Dual Stage Drinking Water Filter**

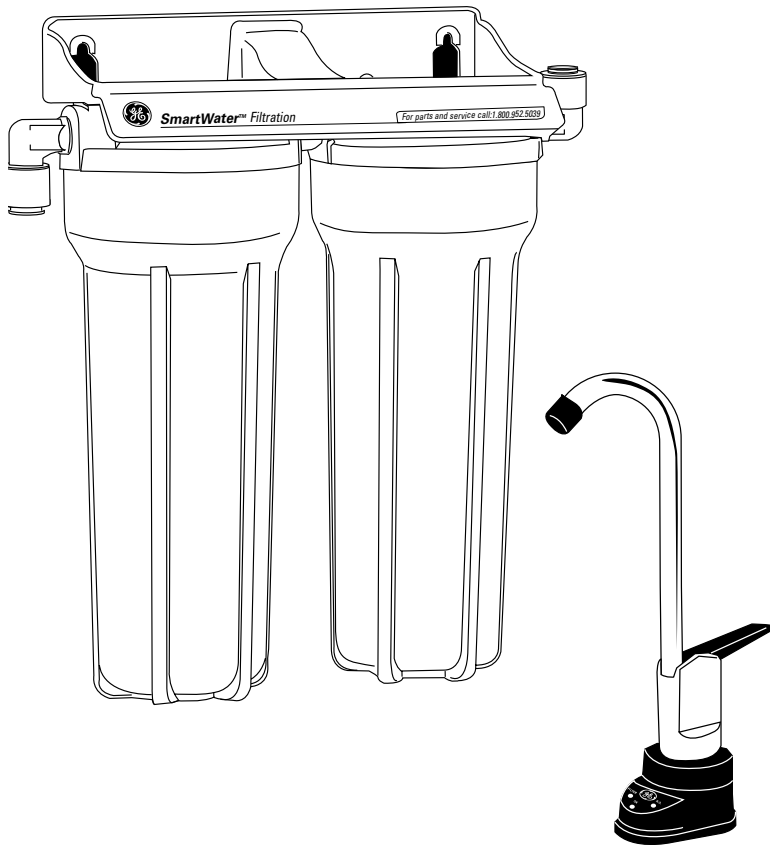

### **Features and Benefits**

- Chrome with Black Short - Reach SmartWater™ Faucet with Electronic Monitor
- 40 Min. - 125 Max. Feed Water Pressure (psi)
- 40 - 100 Degrees Fahrenheit Feed Water Temperature
- 0.6 Filtered Water Flow (gpm)
- Filter Included with Electronic Filter Change Indicator
- Filter I (Sediment) - Filter Set FXSVC
  - Filter Cartridge - Block Activated Filter
- Filter II (Lead, Cysts) - Filter Set FXSVC
  - Filter Cartridge - Block Activated Carbon
  - Partical Removable - Absolute 1 Micron
  - Chlorine Reduction - 98%/540 Gallons
  - Lead Reduction - 99%/1250 Gallons
  - Cysts Reduction - 99.99%
  - Turbidity Reduction - 99%
  - VOC Reduction - 99%/540 Gallons
  - Lindane Reduction
  - Asbestos Reduction - 99%
- Undercounter Installation (kit included)
- Optional Basement Installation (hardware not included)
- Model GXSV10C - White