
HOTPOINT

RB753BC – Hotpoint 30" Free-Standing Electric Range

Dimensions (in inches)

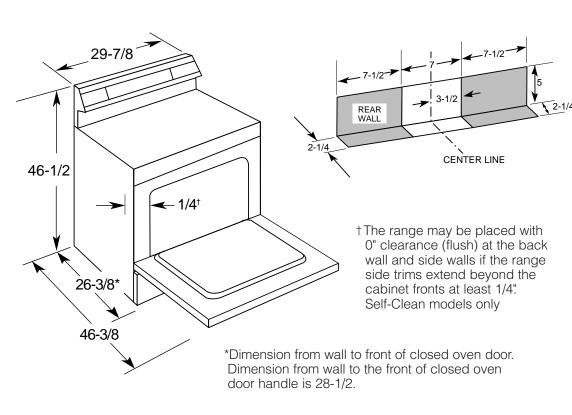

KW Rating	
240V	10.2
208V	7.7
Breaker Size	
40 Amps [†]	

*Note: Check local codes for required breaker size.

A properly grounded branch circuit with a 3 prong grounding type receptacle is required for Hotpoint ranges.

Note: 30" Electric Ranges conform to U.L. requirements for 0" spacing from walls below countertops. However some kitchen cabinet finishes can be damaged by heat from the range heating elements. It is recommended that a clearance of at least 1-1/2 inches be maintained to walls. Where varnished wood or plastic film finishes are used, a minimum clearance of 6 inches should be maintained.

Receptacle Locations: Locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.




All Hotpoint ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



HOTPOINT

RB753BC – Hotpoint 30" Free-Standing Electric Range

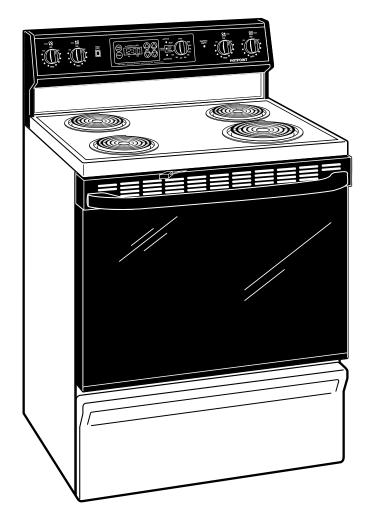

Features and Benefits

- 5.0 Cu. Ft. Self-Cleaning Oven
- Lift-Up Porcelain-Enamel Upswept Cooktop
- Two 8" and Two 6" Plug-in Calrod™ Heating Elements
- Removable One-Piece Drip Bowls
- Auto Self-Clean with Variable Cleaning Time
- EasySet Electronic Oven Controls
- Electronic Digital Clock and Minute Timer
- 2 Oven Shelves
- Auto Oven Shut-Off
- Audible Preheat Signal with Light
- Heating Element "On" Indicator Light
- Broiler Pan with Grid
- Interior Oven Light
- Lift-Off Glass Oven Door with Window
- Full-Width Storage Drawer
- Designer-Style Handle
- Model RB753BCWH White
- Model RB753BCCT Bisque