




Profile™

JS966SD/TD/WD/KD/CD/BD—GE Profile™ 30" Slide-In Electric Range


Counter Installation (in inches)

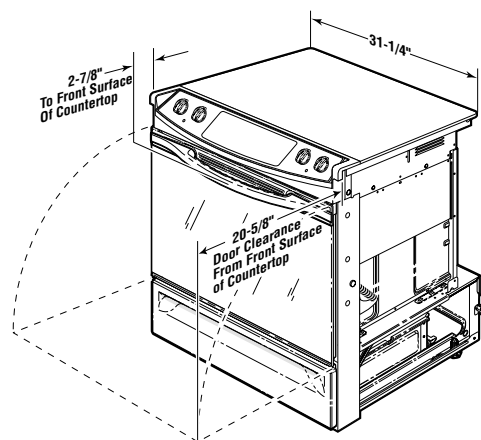


KW Rating	
240V	12.1
208V	9.1
Breaker Size	
240V	40 Amps†
208V	40 Amps†

†Note: Check local codes for required breaker size


Cooktop Dimensions (in inches)

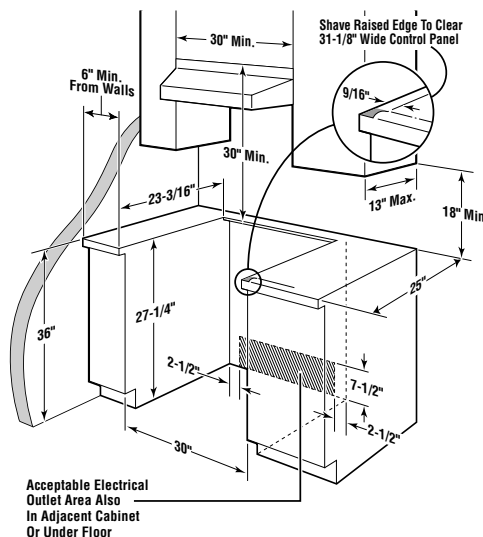

If you are NOT using the optional Filler or Backguard:



If you are using the optional Filler or Backguard:



Note: Cabinets installed adjacent to slide-in electric ranges must have an adhesion spec of at least 194°F temperature rating.

Note: All 30" Slide-In Ranges conform to U.L. requirements for 0" spacing from range to adjacent walls below countertop. To reduce possibility of scorching the side walls above the countertop when no load is present on burners, it is recommended that a minimum 6" spacing from adjacent side wall be allowed for possible extended high-heat element operation.

Receptacle Locations: For all 30" Slide-In Ranges locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.

Maintop Filler

(Fills gap between cooktop and wall when unit is installed in 30" free-standing cutout)
JXS66WW—White
JXS66CC—Bisque
JXS66BB—Black

Accessory Backguards

(Attaches to the back of range as a backguard when unit is installed in 30" free-standing cutout)
JXS39SS—Stainless
JXS36WW—White
JXS36CC—Bisque
JXS36BB—Black

Body Sides

(Slide-in ranges are sold without sides installed. Can be installed on either left or right when unit has one exposed side [no cabinet adjacent]. Kit contains 1 body side)
JXS76WW—White
JXS76CC—Bisque
JXS76BB—Black

Vertical Side Trim Kits

(If cabinet cutout width is more than 30", a vertical side trim kit may be used to close the gap between the range and cabinet)
JXS86WW—White
JXS86CC—Bisque
JXS86BB—Black


Lower Trim Kits

(If counter height is greater than 36.5", a lower trim kit is recommended to extend the useful height to 38" maximum)
JXS56WW—White
JXS56CC—Bisque
JXS56BB—Black



Profile™

JS966SD/TD/WD/KD/CD/BD—GE Profile™ 30" Slide-In Electric Range

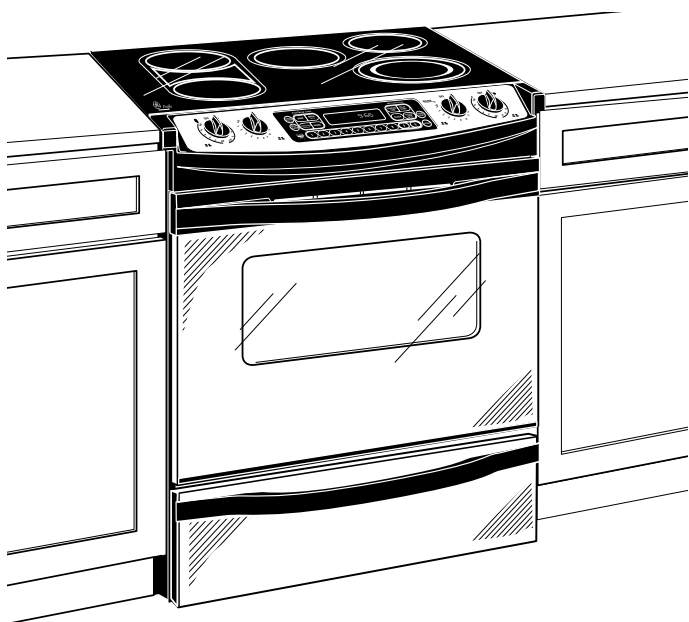

Features and Benefits

- Frameless Ceramic Glass Cooktop
- Self-Cleaning Oven with Automatic Oven Door Lock
- Variable Cleaning Time with Delay Clean Option
- Two 7" Ribbon Heating Elements with connecting Bridge Element, One 6"/9" Dual Element, One 6" and fifth element warming zone
- SmartSet Electronic Oven Controls
- Digital Electronic Clock and Kitchen Timer
- Convection Roast and Convection Bake
- Convection Conversion
- Automatic Meat Thermometer
- 3 Heavy-Duty Oven Shelves
- Automatic Oven Shut-Off with Override
- Roasting Rack
- Hot Surface Indicator Lights
- Broiler Pan with Grid
- Halogen Interior Oven Light
- Storage Drawer
- Integrated Designer-Style Handle
- Frameless Glass Oven Door with Big-View Window
- Model JS966SDSS—Stainless Steel
- Model JS966TDWW—True White
- Model JS966WDWW—White on White
- Model JS966KDCC—True Bisque
- Model JS966CDCC—Bisque
- Model JS966BDBB—Black on Black