



**GE APPLIANCES**  
a Haier company

# AIR & WATER

SOLUTIONS

## RealMAX 4500W Electric Water Heaters

### KEY FEATURES

#### REAL CAPACITY

Get the most from the only water heater that holds a true capacity of hot water compared to electric steel tank water heaters per DOE rated gallon capacity on tall and short models.

#### MAXIMUM PERFORMANCE

Live comfortably with this best in class water heater that delivers up to 63 gallons of hot water in the first hour of use measured through DOE First Hour Rating.

#### ANODE ROD

Durable magnesium design offers long-lasting protection against corrosion to extend the life of your water heater tank.

#### 4500W HEATING ELEMENTS

Two 4500W heating elements offers the flexibility to be installed on a 30-amp or 25-amp breaker.

#### DRAIN VALVE

Glass filled Nylon construction can be counted on to provide long-lasting service.

#### EASY INSTALLATION

Replace your old water heater quickly and easily using standard water and electric connections. T&P relief valve factory installed.

#### LEADING WARRANTY

RealMAX water heaters carry an 8-year tank and parts limited warranty.\*



Certified to  
NSF/ANSI 372  
See [http://info.nsf.org/Certified/Lead\\_Content/](http://info.nsf.org/Certified/Lead_Content/)  
for specific model testing



Listed by  
Underwriters  
Laboratories



Scan here to learn more about the full line of water heater solutions


Visit [geappliancesairandwater.com](http://geappliancesairandwater.com) for more details.



# SPECIFICATION DETAILS

Model Number	Nominal Capacity (Gallons)	Rated Storage	First Hour Rating (Gallons)	Uniform Energy Factor Min	Recovery @ 90°F Gallon per Hour	Element Wattage	Dimensions in Inches Approx.					Product Weight (lbs) est.	Shipping Weight (lbs) est.
							A	B	C	D	E		
<b>Short Models</b>													
GE40S08DAT	40	40	63	0.92	25	4,500	51-3/8	42-7/8	22	8	52-7/8	121	133
<b>Tall Models</b>													
GE40T08DAT	40	40	57	0.92	25	4,500	64	56	20	8	65-1/2	127	139
<b>Lowboy Models Top Part</b>													
GE40L08DAT	40	36	56	0.92	25	4,500	32-3/4	22-5/8	27	8	34-1/4	135	145

Water connections are 3/4".  
Dimensions and specifications are subject to change without notice.

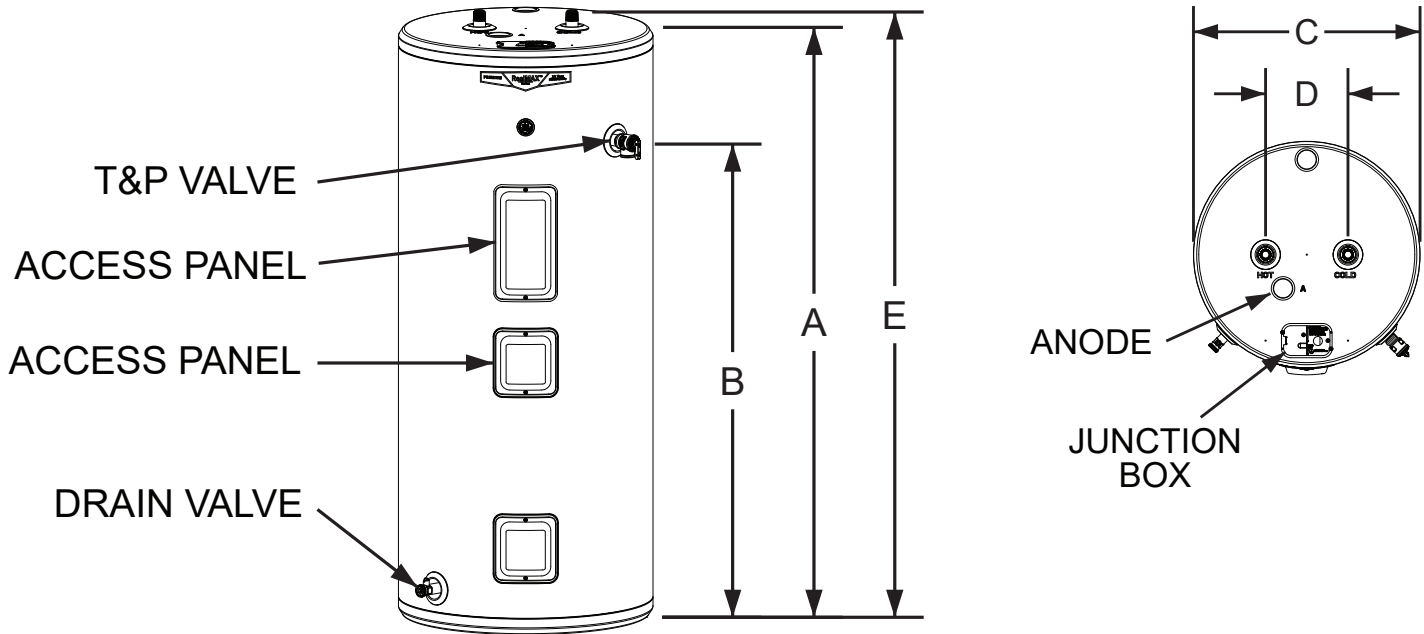

Illustrations are intended for dimensional reference only.  
Refer to photograph for actual product appearance

**LOCAL INSTALLATION REGULATIONS:**

This water heater must be installed in accordance with these instructions, local codes, utility codes, utility company requirements or, in the absence of local codes, the latest edition of the National Electrical Code. It is available from some local libraries or can be purchased from the National Fire Preventions Association, Batterymarch park, Quincy, MA 02169 as booklet ANSI/NFPA 70