PT920SR GE Profile™ 30" Built-In Single Convection Wall Oven

Dimensions and Installation Information (in inches)

KW Rating	
240V	3.8
208V	2.8
Breaker Size	
240V	20 Amps
208V	20 Amps

Most 30" Wall Cabinets can be used with this unit.

Note: These ovens are not approved for stackable installations. Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.


Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Side-by-side installations require at least 2" between cutouts.

For answers to your Monogram,®GE Profile™ or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.



imagination at work

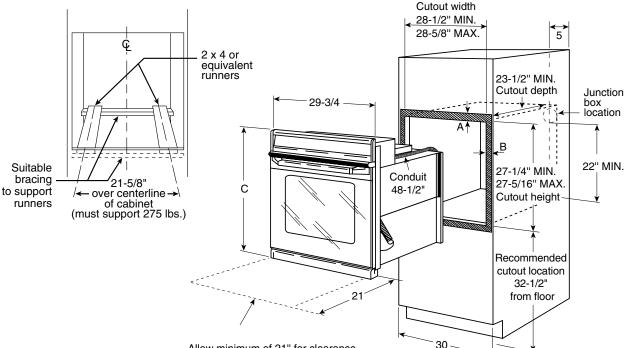

Allow minimum of 21" for clearance to adjacent corners, drawers, walls, or etc.

A=Allow 1" overlap of oven over top and bottom edges of cutout. B=Allow 11/16"-3/4" for overlap of oven over side edges of cutout. C=28-1/4" without trim and 28-3/4" with trim.





PT920SR GE Profile[™] 30" Built-In Single Convection Wall Oven

Optional Undercounter Dimensions and Installation Information


Note: 36" radiant and induction cooktops are approved for use over GE 30" single wall ovens only. 30" radiant and induction cooktops are approved for use over GE 30" and GE 27" single wall ovens. Refer to cooktop and wall oven installation information packed with products for current dimensional data.

Note: CleanDesign or Sealed Burner Gas

This installation is to achieve minimum gap between bottom of countertop and control panel. For this installation, the bottom trim will not be flush with a typical 4" toe kick

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.



Top and/or side

necessary if unit


existing cabinets

fillers may be

is positioned

between

With Electric Cooktop

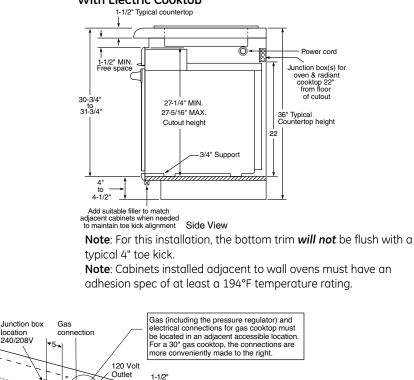

Countertop

36" MIN

22" MIN. above

support platform

Gas or electric cooktops may be installed over this oven. See cooktop installation instructions for cutout size. See label on top of oven for approved cooktop models.

For answers to your Monogram,[®] GE Profile[™] or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.



imagination at work



Allow 11/16'

overlap over side

- . !

edges of cutout

23-1/2" MIN

Cutout depth

28-1/2" MIN

28-5/8" MAX

27-1/4" MIN

27-5/16" MAX

Cutout height

Match toe kick height front and two sides

3/4" Support platform required





PT920SR GE Profile™ 30" Built-In Single Convection Wall Oven

Features and Benefits

- Glass Touch LCD Controls–Combine a smooth, easy-to-clean glass design with large, easy-to-read graphics to facilitate easier usage
- Black gloss oven interior–Black oven interior adds a stylish touch to any kitchen
- PreciseAir[™] convection system–A reversing fan circulates heat and air for evenly browned and baked foods
- Heavy-duty roller rack–Racks provide easy access to items inside the oven by simplifying loading and unloading
- Convection Bake–This setting is optimal for baking casseroles or lasagnas, yeast breads, pies and pizzas with no need to turn the pan
- Convection roast–Optimal for larger cuts of meat, this setting rotates the heat around all sides, sealing in the juices, producing rotisserie results at up to 25% faster than a conventional oven
- Flat back convection–Convection fan system is only 1" deep to provide additional room for cookware
- Hidden bake oven interior–Conceals the lower oven bake element to eliminate hard-to-reach areas that collect food and spills for easy cleaning
- Self-clean oven–Self-clean allows you to spare yourself from the trouble and effort it takes to scrub the oven interior
- Dual interior lighting–Bright interior lights help you check on the progress of your cooking
- Model PT920SRSS Stainless steel

