PP932TM/KM/BM GE Profile™ Series 30" Built-In CleanDesign Electric Cooktop


Dimensions and Installation Information (in inches)

KW Rating	
240V	8.6
208V	6.5
Breaker Size	
240V	40 Amps [†]
208V	40 Amps [†]

Note: Check local codes for required breaker size **Important:** Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.


Note: 30" Ribbon cooktops are approved for use over select GE 27" and GE 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Profile™ Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft. Consult cabinet and countertop manufacturer's specs for flush mount installation prior to install. Before installing, consult installation instructions packed with product for current dimensional data.

Filler Trim Kit: When replacing an old GE 30" cooktop (with larger opening) use the following one-piece trim kit to fill in the over-size hole. Available at additional cost. JXTR32W (True White) JXTR32B (Black glass) JXTR32C (True Bisque)



"Depth of unit of contact cone action location (year) is 6.14" on modes PPI/75/945 and 4.3/16" on modes CP069/950 PP944406/905/912, and JP7565/94. Depth of unit at baffle (front) is 4.5/8" notices PPP4940(900).

"Wated bull sous contenent may require up to 30" additional cleanance to prevent interference with oursed front."

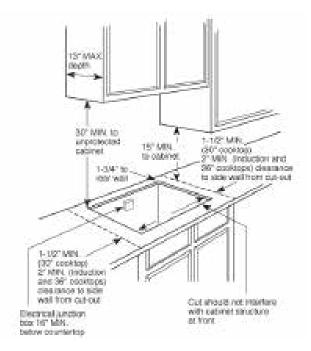





PP932TM/KM/BM GE Profile™ Series 30" Built-In CleanDesign Electric Cooktop

Features and Benefits

- Ceramic Glass Cooktop A smooth cooktop surface makes cleaning quick and easy
- Ribbon Heating Elements Provide powerful heat beneath a smooth glass surface to ensure even heat and fast warm-up times
- Power Boil Element Accommodates various-size pots or pans and 3,000 watts of power speeds the boiling process
- Bridge Element Combines three cooktop elements into one large cooking area, ideal for oversized cooking pans
- Control Lock Capability Provides the ability to lock controls, helping protect from unintentional activation
- Frameless Design A smooth and seamless cooktop surface makes cleaning quick and easy
- Dishwasher-Safe Knobs Feature a robust construction for safe and easy cleaning
- Melt Setting Optimized for melting chocolate, this setting delivers the low gentle heat needed
- Simmer Setting Ideal for making delicate sauces or melting butter, and ensures a food-safe temperature of at least 140°F
- Model PP932TMWW True white
- Model PP932KMCC True bisque
- Model PP932BMBB Black on black

