

# MONOGRAM 42" BUILT-IN SIDE-BY-SIDE REFRIGERATOR

ZISB420DN



## WIFI CONNECT

Enjoy the convenience and freedom of wirelessly controlling functions from your smartphone

## LED LIGHTING

Light columns in the freezer and fresh food compartments extend the full length of the interior and LED lighting located inside the vegetable and climate-control drawers illuminate contents without compromising space

## COLOR-MATCHED DISPENSER WITH PROXIMITY SENSOR

Designed to accommodate glassware of all sizes, from pitchers to tumblers; control graphics light up as you approach and automatically switch off when you walk away

## GE® WATER FILTER

Has been moved from the fresh food compartment to the overhead cabinet, where it is discreetly out of sight

## DELI DRAWER ON FULL-EXTENSION SLIDES

Keeps meats, cheeses and other everyday foods within easy reach

## SEALED VEGETABLE DRAWER

Helps preserve the freshness of foods

## ADJUSTABLE GLASS SHELVES

Easily accommodate party trays and platters

## GALLON-SIZE DOOR BIN

Holds milk containers, two-liter bottles and pitchers

## ADJUSTABLE DOOR BINS

Can be moved to one of two positions in seven locations

## DAIRY BIN WITH CENTER DIVIDER

Has a unique magnetic seal that locks in freshness

## FILTER-CHANGE INDICATOR LIGHT

Located on the upfront control panel, provides a visual reminder when it's time to replace the filter for the water dispenser

## SABBATH MODE


Designed to disable functions in accordance with Sabbath-observing practice

---

SECTION 1

STANDARD INSTALLATION

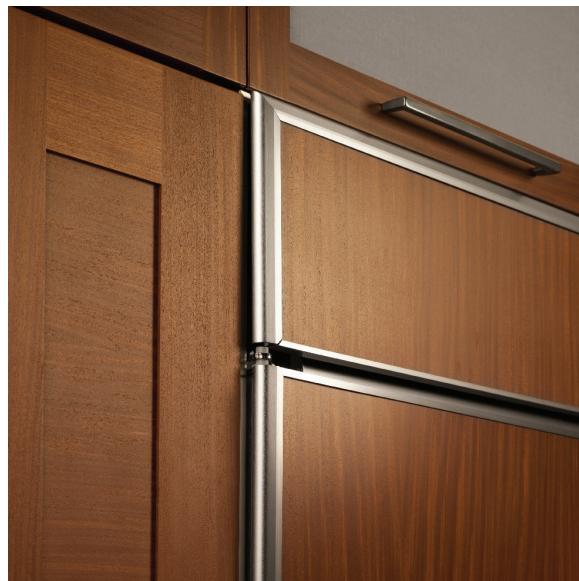1/4" FRAMED PANELS



3/4" OVERLAY PANELS



SECTION 2

FLUSH INSET INSTALLATION

With required ZKFN Accessory Kit for custom panel model only.






## SPECIFICATIONS

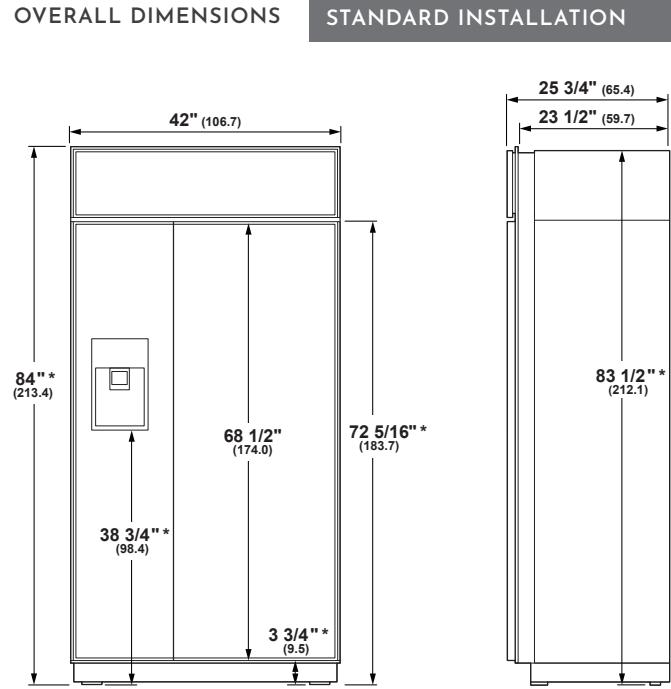Overall Width	42" (106.7 cm)
Overall Height	84" (213.36 cm)
Overall Depth	25 3/4" (65.4 cm)
Door Clearance	26 5/8" (67.6 cm)
Cutout Width	41 1/2" (105.4 cm)
Cutout Height	84±.500 (212.1 - 214.6 cm)
Cutout Depth	24" (61 cm)
Plumbing Requirements	1/4" OD copper tubing or GE SmartConnect kit
Shipping Weight	725 lb (328.9 kg)


## ATTENTION ELECTRICIAN:

A 115 volt 60Hz, 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall.


## OVERALL DIMENSIONS



## STANDARD INSTALLATION

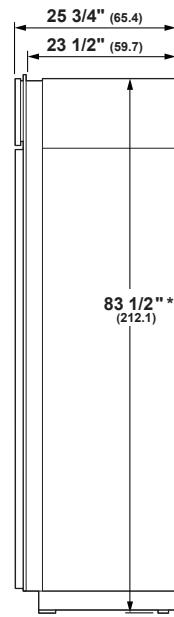

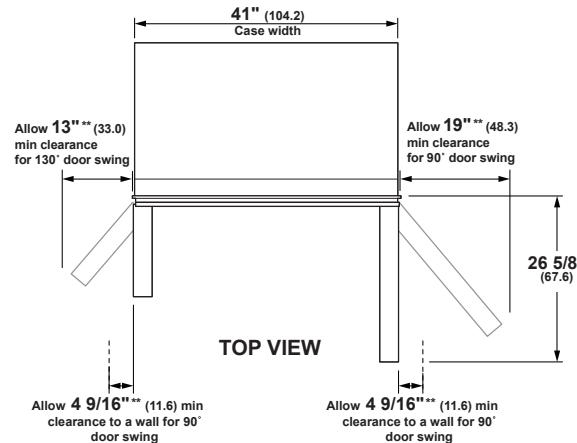
\*Shipping height. Use leveling legs and wheels for maximum 1" height adjustment from shipping height.



\*\* These refrigerators are equipped with a 3-position door stop. The factory-set 115° door swing can be adjusted to 90° if clearances to adjacent cabinets or walls is restricted. Allow full 130° door swings for pan removal. If the 90° door stop position is used, pan access is maintained, but pan removal is restricted. Dimensions based on custom handle height of 2 9/16" (6.5).


Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

## STANDARD INSTALLATION

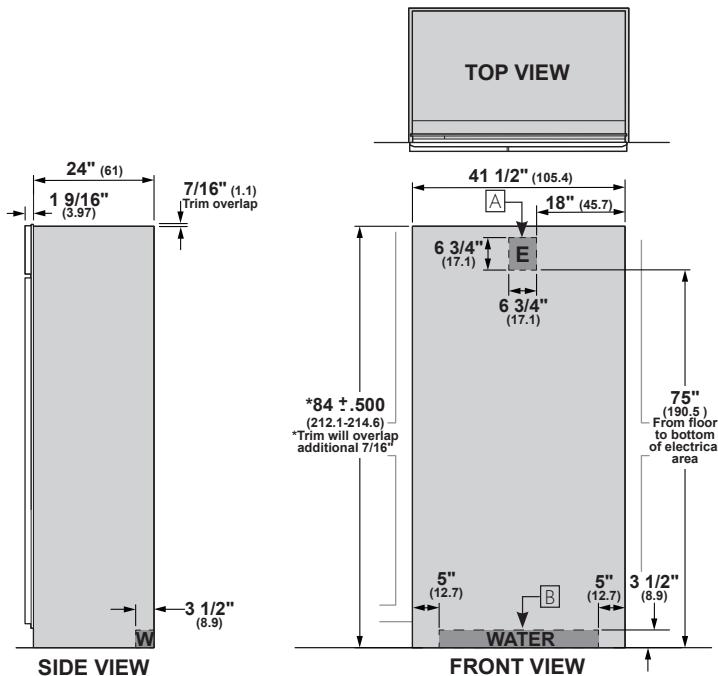

The refrigerator will project forward, slightly beyond adjacent cabinetry.

## ANTI-TIP BRACKET

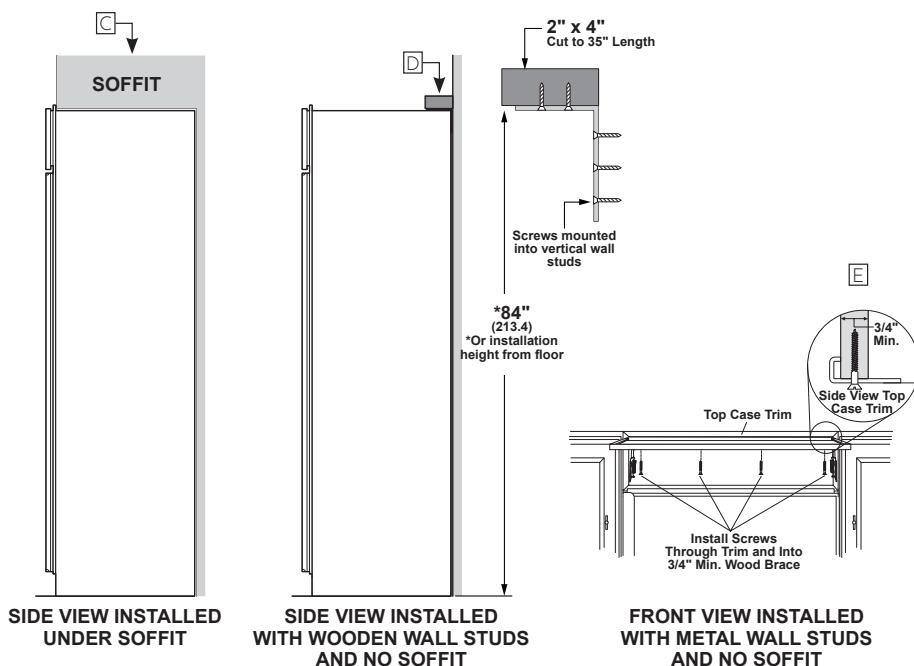

## STANDARD INSTALLATION

### HELPFUL TIPS

**A** Mounting the junction box in this location will also allow for front accessibility through access panel.

**B** Water supply area.

### WARNING:

The refrigerator is top heavy and must be secured to prevent the possibility of tipping forward. Failure to do so may result in death or serious injury.

The information below is for cabinet design only. When installing the anti-tip system you must use the product installation instructions.

Determine your installation construction and required anti-tip configuration:

**C** Installed Under Soffit  
After installing unit into installation opening, raise grille panel and screw metal case sides to adjacent cabinet. When installed under a soffit, the soffit cannot exceed 24" deep. The top case trim overlaps the bottom of the soffit.

**D** Wooden Wall Studs and No Soffit  
• Cut a 2" x 4" block and secure to brackets provided.

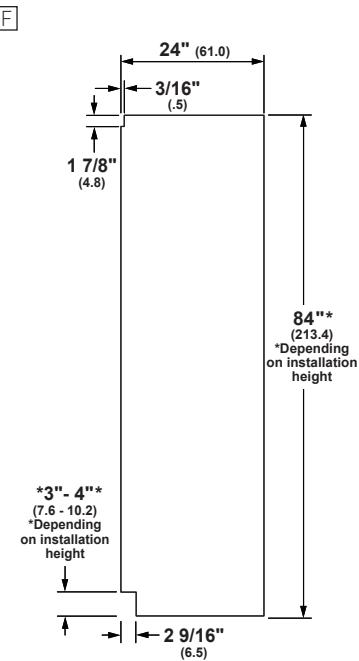
• Secure brackets to back wall of opening at 84" or your installation height from the floor.

**E** Metal Wall Studs and No Soffit  
This method requires securely fastened cabinets on both sides and a 3/4" minimum wood brace above unit, with its front surface 24" from back wall.



• After installing unit into opening, raise grille panel and attach metal case top trim to 3/4" minimum wood brace.

• The brace spanning the enclosure must be securely fastened to cabinets on both sides.

See Installation Instructions for detailed instructions.

**CUSTOM SIDE PANELS**

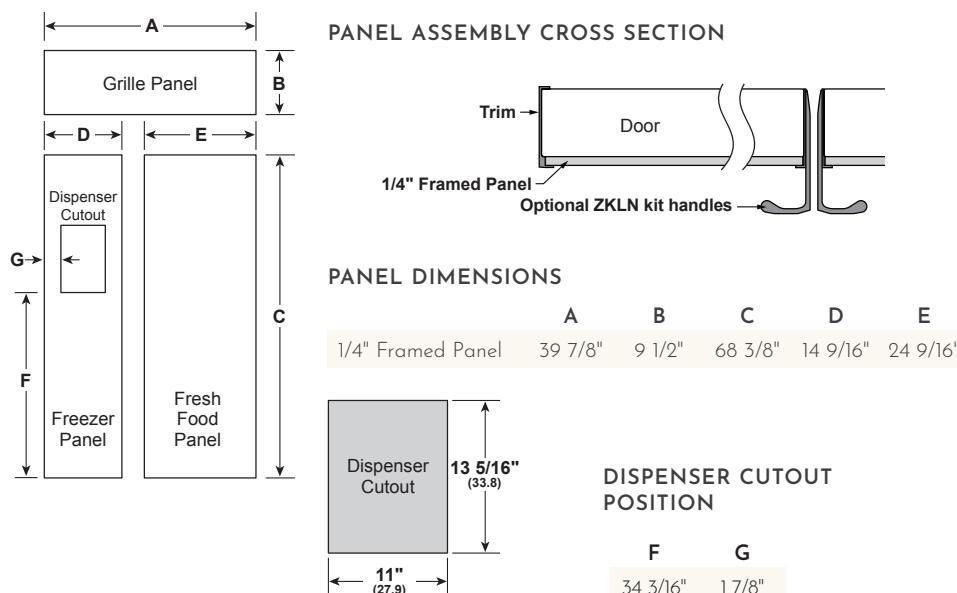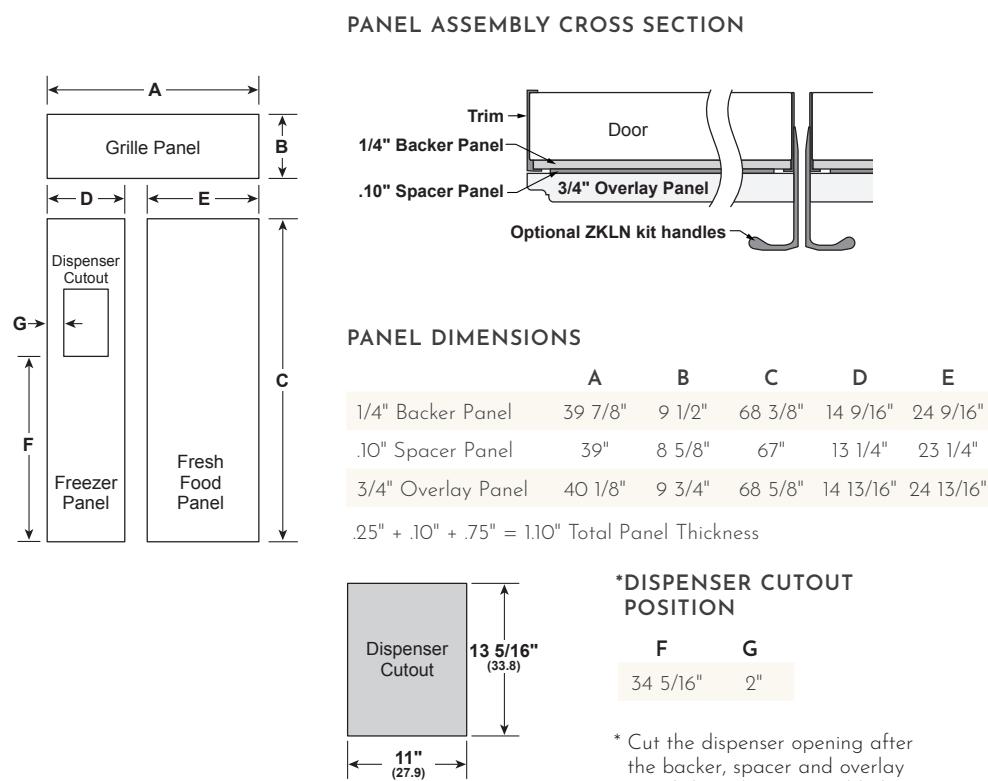**STANDARD INSTALLATION**
**HELPFUL TIPS**

[F] Side panels must be used whenever the sides of the refrigerator will be exposed. The 1/4" side panels will slip into the side case trim. Secure the panels to the refrigerator with stick-on hook and loop fastener strips. Order the side panels from the cabinet manufacturer.

**1/4" FRAMED PANEL DIMENSIONS**

**3/4" OVERLAY PANEL DIMENSIONS**

**STANDARD INSTALLATION**
**HELPFUL TIPS**

Trimmed refrigerators are designed to be customized with decorative panels. Field-installed custom door and grille panels are required.

**1/4" FRAMED PANELS:**

For 1/4" thick custom panels ordered from your cabinetmaker; the decorative panels slide into the trim.

**MAXIMUM TOTAL PANEL WEIGHT:**

- Fresh food door panel – 75 lbs.
- Freezer drawer panel – 53 lbs.
- Grille panel – 18 lbs.

**3/4" OVERLAY PANELS:**

For 3/4" thick custom panels ordered from your cabinetmaker; the decorative panels slide into the trim.

The overlay panel must be secured to a 1/4"-thick backer panel which slides into the trim. A spacer panel 0.10" thick must be placed between the overlay and backer panels.

Center each panel over the other. Assemble the panels with glue and screws. Screws must be countersunk into the backer panel.

**NOTE:** Left-to-right offset is not always equal to top-to-bottom offset.

**MAXIMUM TOTAL PANEL WEIGHT:**

- Fresh food door panel – 75 lbs.
- Freezer drawer panel – 53 lbs.
- Grille panel – 18 lbs.

**DOOR HANDLES**

Door handles are sold separately and not included. Custom handles supplied by your cabinetmaker may be used.

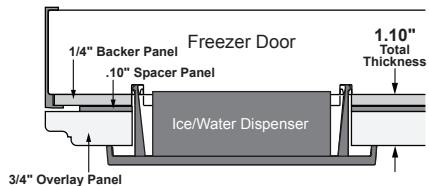
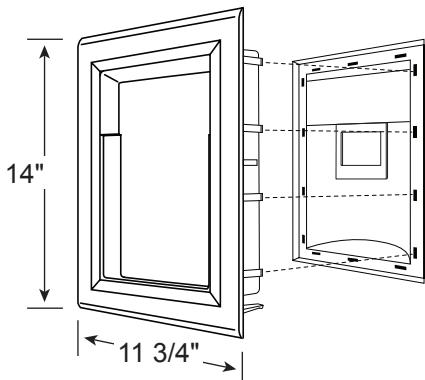
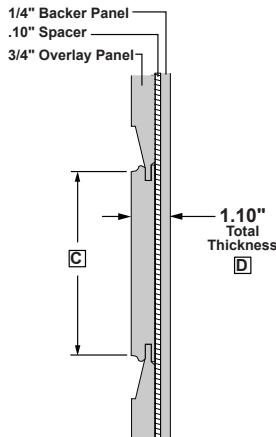
**STATEMENT HANDLE**  
ZKSS2H2PNSS and ZKPN mounting and installation kit must be ordered separately.

**MINIMALIST HANDLE**  
ZKSS2H2CNSS and ZKPN mounting and installation kit must be ordered separately.

**VISOR HANDLES**

ZKLN optional visor handle kit is available for ordering. Kit includes two handles.

**DISPENSER TRIM**

**1/4" FRAMED PANEL DISPENSER TRIM**
**A**

**3/4" OVERLAY PANEL DISPENSER TRIM**
**B**
**□ RAISED OVERLAY PANEL DESIGN ON DISPENSER MODELS**

**DISPENSER TRIM**

**SIDE VIEW CROSS SECTION**  
**(SHOWING RAISED OVERLAY**  
**WITH MIDDLE RAIL)**
**STANDARD INSTALLATION**
**HELPFUL TIPS**

These refrigerators are supplied with two dispenser trims, one for framed panels and one for overlay panels.

**A 1/4" FRAMED PANEL**
**DISPENSER TRIM:**

The framed panel must be 1/4" nominal thickness to fit the dispenser trim.

- The dispenser trim fits over the custom panel and snaps into the freezer door.
- If the panel is less than 0.250" thick, a noticeable gap may be created around the dispenser trim. Foam tape may be applied on the door to improve the fit.
- If the panel is more than 0.250" thick, the dispenser trim cannot be secured to the door.

**B 3/4" OVERLAY PANEL**
**DISPENSER TRIM:**

The 3/4" overlay dispenser trim is designed to fit a total panel thickness of 1.100".

- If the panel is less than 1.100" thick, a noticeable gap may be created around the dispenser trim.
- If the panel is more than 1.100" thick, the dispenser trim cannot be secured to the door.
- The overlay panel must be constructed according to the specifications shown to achieve the correct total thickness.
- Alternative panel construction methods such as securing a 3/4" panel to a 1/4" backer panel cannot be used. Another method, routing a 3/4"-thick panel on all sides, cannot be used. These methods will not result in the required 1.100" panel thickness.
- When a raised panel design is to be used, a custom wide middle rail is required.

**□ RAISED OVERLAY PANEL**
**DESIGN ON DISPENSER**
**MODELS:**

When a raised panel design is to be used, a custom wide middle rail is required to accept the dispenser trim.

- The middle rail must be wide enough to allow for the dispenser trim to overlap the opening.
- The middle rail must be 1.10" total thickness to accept the dispenser trim.



#### SPECIFICATIONS

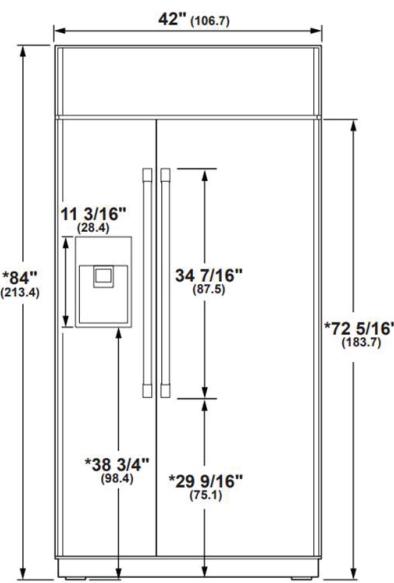
Overall Width	44" (111.8 cm)
Overall Height	84 1/2" (214.6 cm) †
Overall Depth	26" (66.0 cm) †
Door Clearance	26 5/8" (67.6cm)
Cutout Width	45" (114.3 cm)
Cutout Height	85" (215.9 cm)
Cutout Depth	26 3/16" (66.5 cm)
Plumbing Requirements	1/4" OD copper tubing or GE SmartConnect kit
Shipping Weight	725 lb (328.9 kg)

† Dimensions include 3/4" custom cabinet panel

#### ATTENTION ELECTRICIAN:


A 115 volt 60Hz, 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall.

#### OVERALL DIMENSIONS AFTER PANEL INSTALL




FRONT VIEW

#### FLUSH INSET INSTALLATION

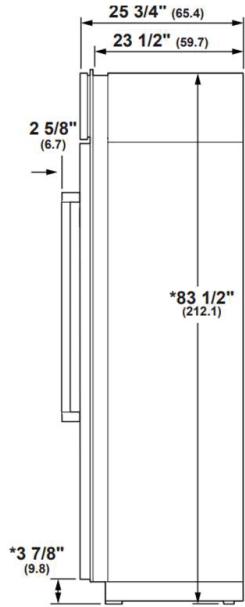

SIDE VIEW


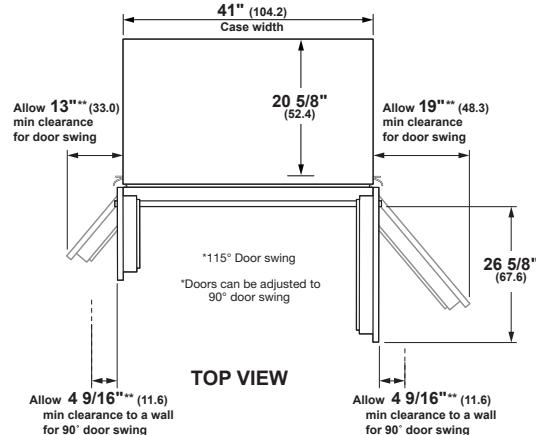
\*Shipping height. Use leveling legs and wheels for maximum 1" height adjustment from shipping height.



TOP VIEW

\*\* These refrigerators are equipped with a 3-position door stop. The factory-set 115° door swing can be adjusted to 90° if clearances to adjacent cabinets or walls is restricted. Allow a 15" minimum clearance to a wall for pan removal. If the 90° door stop position is used, pan access is maintained, but pan removal is restricted. A 130° door swing option is available for standard installation only. Dimensions based on custom handle height of 2-9/16" (6.5).

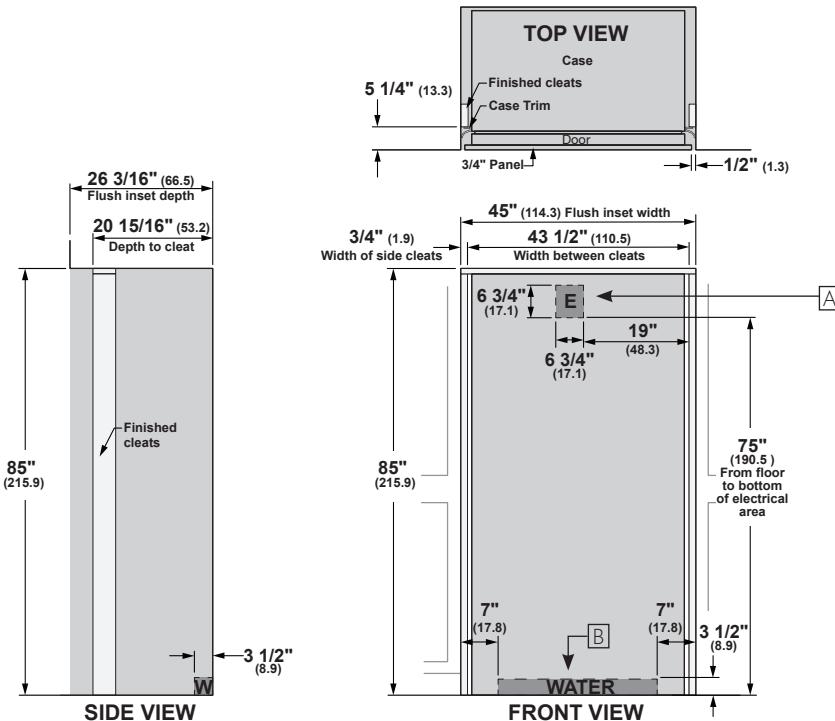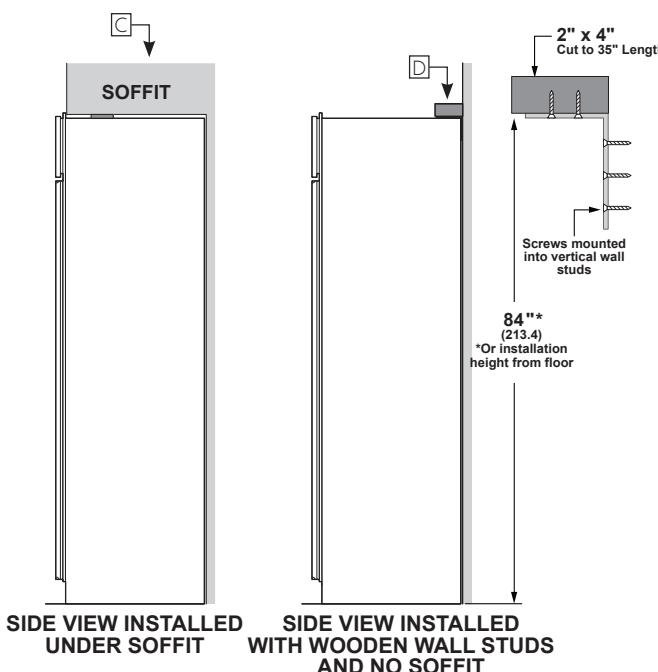Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

**FLUSH INSET INSTALLATION 3/4" PANELS**

**ANTI-TIP BRACKET**

**FLUSH INSET INSTALLATION**
**HELPFUL TIPS**

**A** Mounting the junction box in this location will also allow for front accessibility through access panel.

**B** Water supply area.

**WARNING:**

The refrigerator is top heavy and must be secured to prevent the possibility of tipping forward. Failure to do so may result in death or serious injury.

The information below is for cabinet design only. When installing the anti-tip system you must use the product installation instructions.

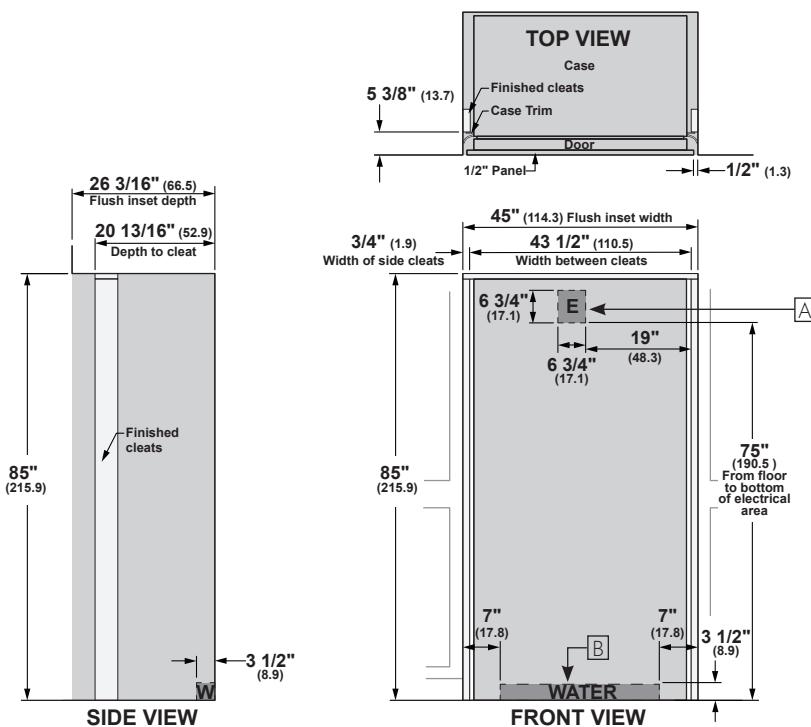
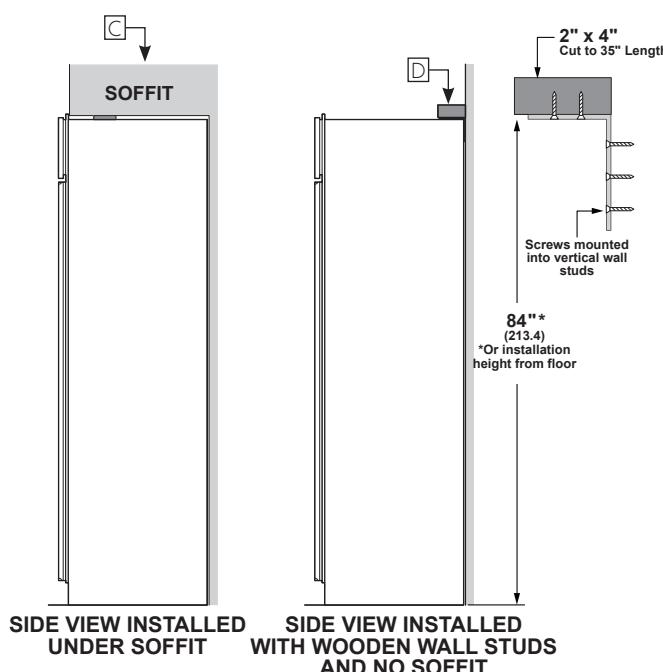
Determine your installation construction and required anti-tip configuration:

**C** Cut a 1" x 4" block 35" long. Measure and mark under the soffit, 5 3/8" from the front edge of the cabinet. Secure the wood block under the soffit. From the bottom of the block to the finished floor should measure 84".

**D** Wooden Wall Studs and No Soffit

- Cut a 2" x 4" block and secure to brackets provided.
- Secure brackets to back wall of opening at 84" or your installation height from the floor.

ZKFN Accessory Kit required for custom panel model only.  
See Installation Instructions for detailed instructions.

**FLUSH INSET INSTALLATION 1/2" PANELS**

**ANTI-TIP BRACKET**


**FLUSH INSET INSTALLATION**  
with required ZKFN Accessory Kit  
for custom panel model only.

**HELPFUL TIPS**

**A** Mounting the junction box in this location will also allow for front accessibility through access panel.

**B** Water supply area.

**WARNING:**

The refrigerator is top heavy and must be secured to prevent the possibility of tipping forward. Failure to do so may result in death or serious injury.

The information below is for cabinet design only. When installing the anti-tip system you must use the product installation instructions.

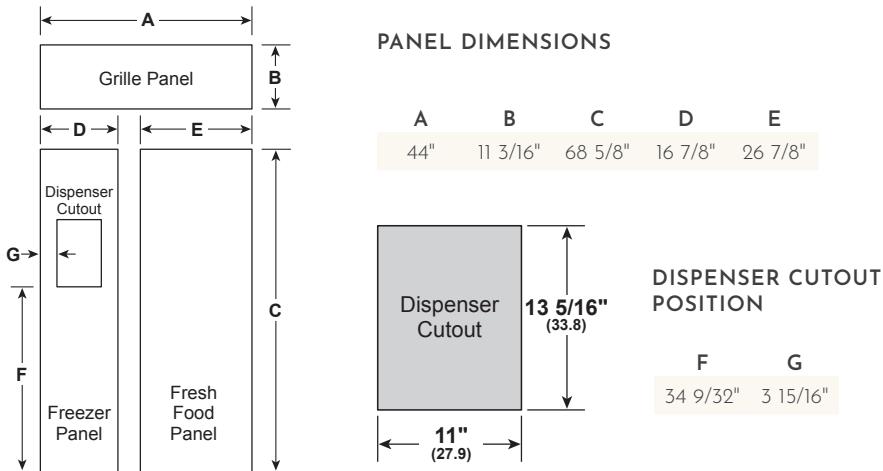
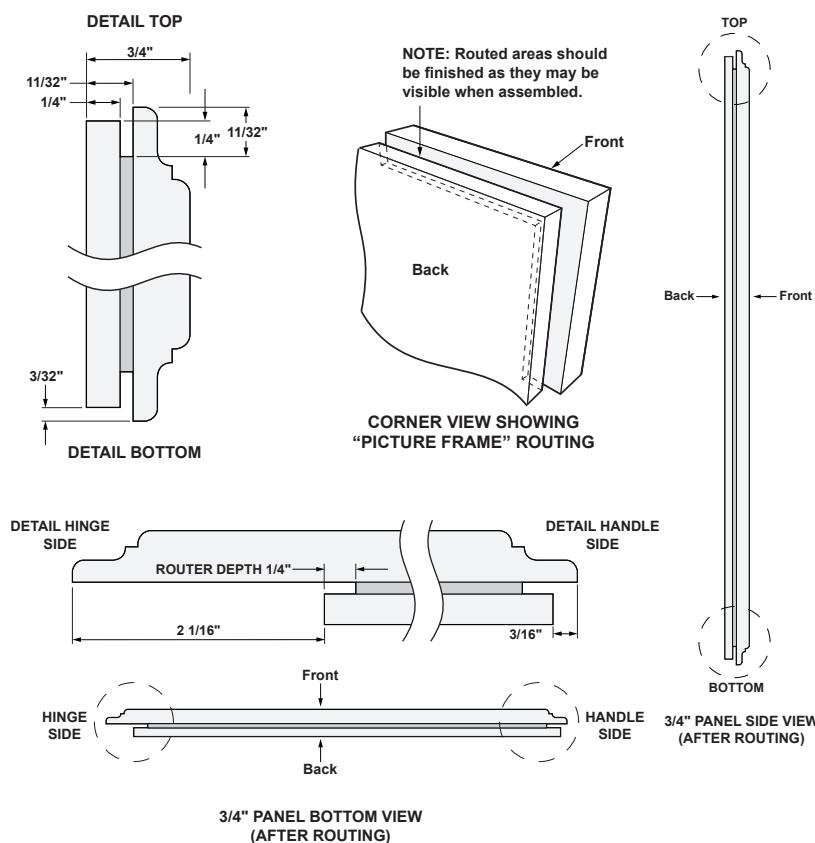
Determine your installation construction and required anti-tip configuration:

**C** Cut a 1" x 4" block 35" long. Measure and mark under the soffit, 5 3/8" from the front edge of the cabinet. Secure the wood block under the soffit. From the bottom of the block to the finished floor should measure 84".

**D** Wooden Wall Studs and No Soffit

- Cut a 2" x 4" block and secure to brackets provided.
- Secure brackets to back wall of opening at 84" or your installation height from the floor.

See Installation Instructions for detailed instructions.

**FLUSH INSET 3/4" PANEL DIMENSIONS**

**3/4" RAISED DOOR PANEL ROUTING**

**FLUSH INSET INSTALLATION**
**HELPFUL TIPS FOR 3/4" ROUTED PANEL**

Custom Panel Refrigerators are designed to be customized with decorative panels. Field-installed 1/2" stacked or 3/4" routed custom door and grille panels are required with additional ZKFN accessory for installation.

3/4" door and grille panels have required routing. The router depth is 1/4" around the complete back side of the panel's perimeter. Additional illustrations provide specific reductions required for hinge, handle, and feature interactions.

Required routing around the perimeter of the custom panel provides installation assembly clearance for aligning the panel to the door and grille trim. See final installation instructions with the product for final attachment requirements.

**NOTE:** Custom Panels constructed with rails and stiles (5-panel):  
Rails minimum width: 3" (7.62 cm)  
Stiles minimum width: 4" (10.16 cm)

**MAXIMUM TOTAL PANEL WEIGHT:**

- Fresh food door panels – 75 lbs.
- Freezer drawer panel – 53 lbs.
- Grille panel – 18 lbs.

**DOOR HANDLES**

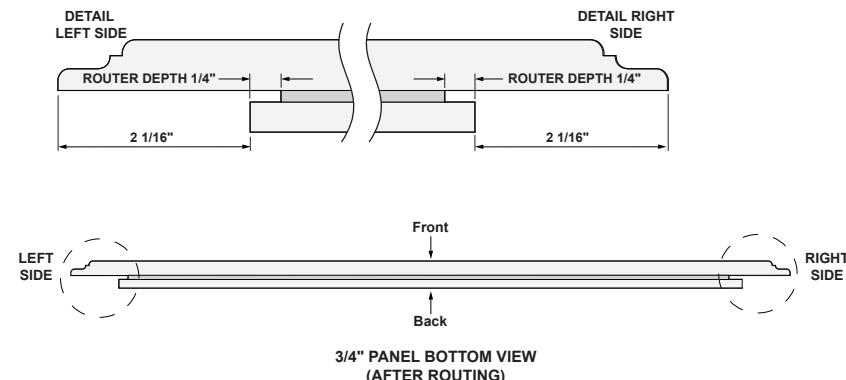
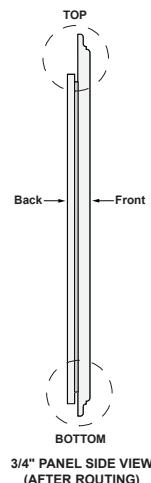
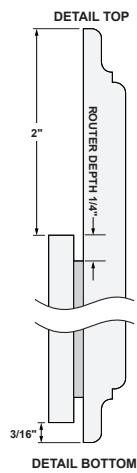
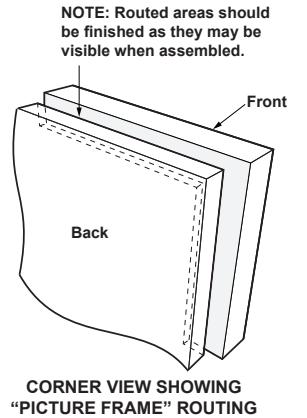
Door handle not included.  
A custom handle supplied by your cabinetmaker may be used.

**WARNING:**


Door Trim Pinch Point

Hazard Improper installation can lead to a finger pinch point hazard between the side door trim and the cabinets when operating the door, especially with children. To minimize this risk you must follow the installation instructions for cabinet dimensions, trim assembly and door stop angle.

### 3/4" RAISED GRILLE PANEL ROUTING



### FLUSH INSET INSTALLATION

#### HELPFUL TIPS FOR 3/4" ROUTED PANEL

Custom Panel Refrigerators are designed to be customized with decorative panels. Field-installed 1/2" stacked or 3/4" routed custom door and grille panels are required with additional ZKFN accessory for installation.

3/4" door and grille panels have required routing. The router depth is 1/4" around the complete back side of the panel's perimeter. Additional illustrations provide specific reductions required for hinge, handle, and feature interactions.

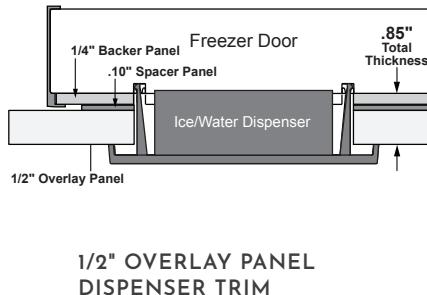
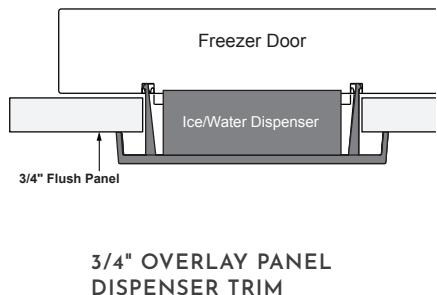
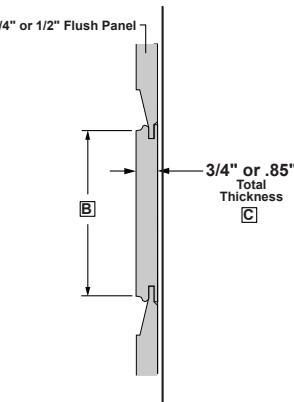
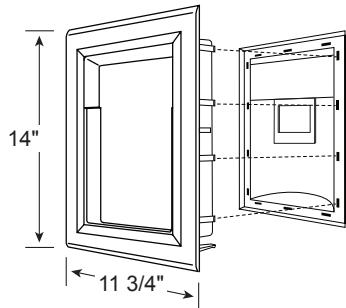
Required routing around the perimeter of the custom panel provides installation assembly clearance for aligning the panel to the door and grille trim. See final installation instructions with the product for final attachment requirements.

#### MAXIMUM TOTAL PANEL WEIGHT:

- Fresh food door panels – 75 lbs.
- Freezer drawer panel – 53 lbs.
- Grille panel – 18 lbs.

#### DOOR HANDLES

Door handle not included. A custom handle supplied by your cabinet maker may be used.

**DISPENSER TRIM**
**A**

**RAISED PANEL DESIGN ON DISPENSER MODELS**

**FLUSH INSET INSTALLATION**
**HELPFUL TIPS**

These refrigerators require the ZKFN accessory with the supplied dispenser trims for custom panel flush inset installation.

**A CUSTOM PANEL DISPENSER TRIM**

The ZKFN accessory provides dispenser trims designed for total custom panel thickness of 3/4" (3/4" routed panels) or 0.850" (1/2" stacked panels).

Custom panel construction must be in compliance with 3/4" routed or 1/2" stacked installation instructions for the refrigerator. Custom panel construction utilizing rails and stiles (5-panel) around the panel perimeter are required to utilize a raised middle rail.

If the panel is less than 3/4" thick, a noticeable gap is created around the perimeter of the dispenser trim.

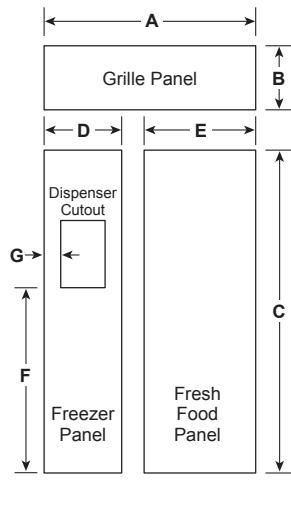
If the panel is more than 0.850" thick, the dispenser trim will not secure to the freezer door frame, preventing an elegant finished trim on the outer panel appearance.

**RAISED PANEL DESIGN ON DISPENSER MODELS:**



When a raised panel design is to be used, a custom wide middle rail is required to accept the dispenser trim.

**B** The middle rail must be wide enough to allow for the dispenser trim to overlap the opening.

**C** The middle rail must be 3/4" total thickness for 3/4" panels or 0.85" total thickness for 1/2" panels to accept the dispenser trim.

**FLUSH INSET 1/2" PANEL DIMENSIONS**

**PANEL DIMENSIONS**

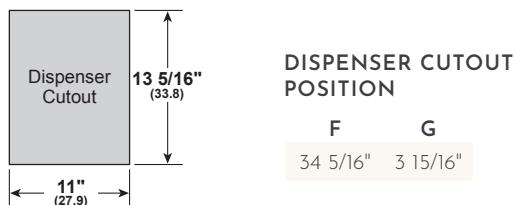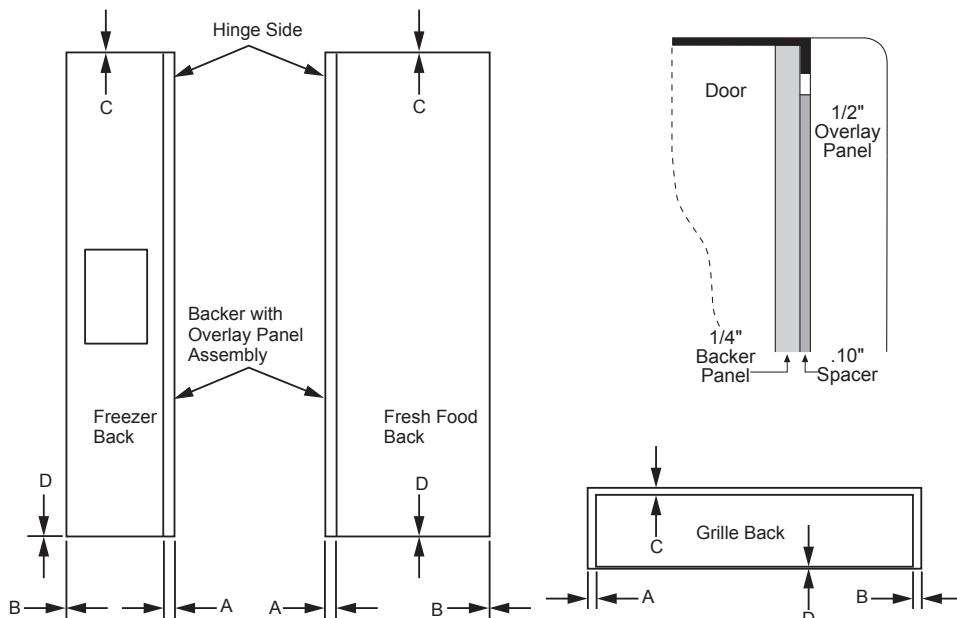	A	B	C	D	E
1/4" Backer Panel	39 7/8"	9 1/2"	68 3/8"	14 9/16"	24 9/16"
.10" Spacer Panel	39"	8 5/8"	67"	13 9/16"	23 9/16"
1/2" Overlay Panel	44"	11 3/16"	68 5/8"	16 7/8"	26 7/8"


**1/4" BACKER ASSEMBLY ROUTING DIMENSIONS**

**PANEL DIMENSIONS**

	A	B	C	D
Fresh Food Panel	2 1/16"	1/4"	1/8"	1/8"
Freezer Panel	2 1/16"	1/4"	1/8"	1/8"
Grille Panel	2 1/16"	2 1/16"	1 15/32"	7/32"

**FLUSH INSET INSTALLATION**
**HELPFUL TIPS**

The 1/2" overlay panel must be secured to a .10" spacer panel and a 1/4" thick backer panel, which slides into the trim.

**ASSEMBLE THE PANELS WITH GLUE AND SCREWS:**

- Center the spacer panel on the backer panel, left to right and top to bottom. Secure the panels with glue.
- Refer to the chart for locating the backer panel to the overlay panel. Secure the overlay panel to the backer panel with glue and screws. Screws must be countersunk into the backer panel.

**MAXIMUM TOTAL PANEL WEIGHT:**

- Fresh food door panel – 75 lbs.
- Freezer drawer panel – 53 lbs.
- Grille panel – 18 lbs.