





GE Appliances

## GSD4500GWW/CC/BB - GE Nautilus™ Built-In Dishwasher

Dimensions (in inches)

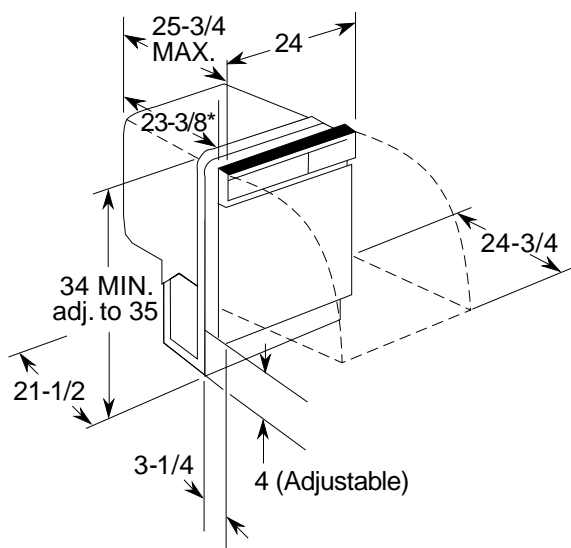

Installation Information  
(in inches)

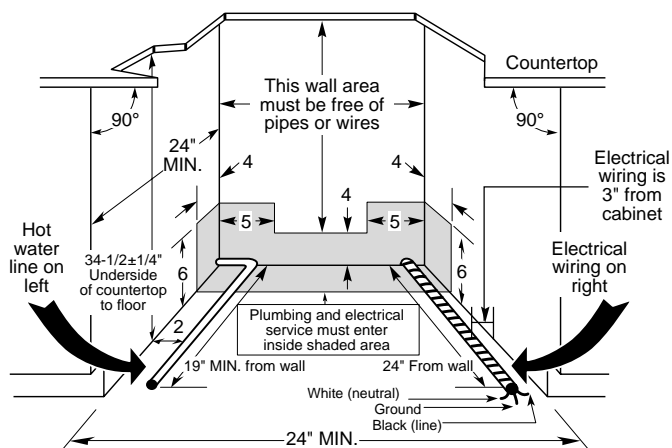


**Note:** Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

**Note:** If a flush look is needed, a 25" base cabinet needs to be used.

### Electrical Rating

Voltage AC.....120  
Hertz .....60  
Total connected load amperage.....6.2  
Calrod® heater watts.....500  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Wood Insert Cut-Out  
Dimensions (in inches)

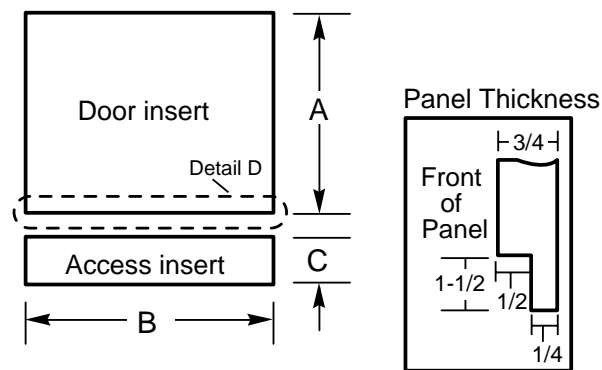

Models/Kits	A	B	C	Panel Thickness
GE Nautilus™ Models/GPF425	19-3/4"	23-9/16"	3-11/16"	1/4"
GE Nautilus™ Models/GPF475	19-7/8"	23-5/8"*	3-11/16"***	3/4"

\*Bottom of panel must be notched 1-1/2" x 1/2" to clear across panel (See illustration above).

\*\*Adjustment required to match adjacent cabinet fronts due to leveling leg adjustment, 4" nominal.


For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at [GEAppliances.com](http://GEAppliances.com) or call GE Answer Center® service, 800.626.2000.





**GE Appliances**

## **GSD4500GWW/CC/BB - GE Nautilus™ Built-In Dishwasher**

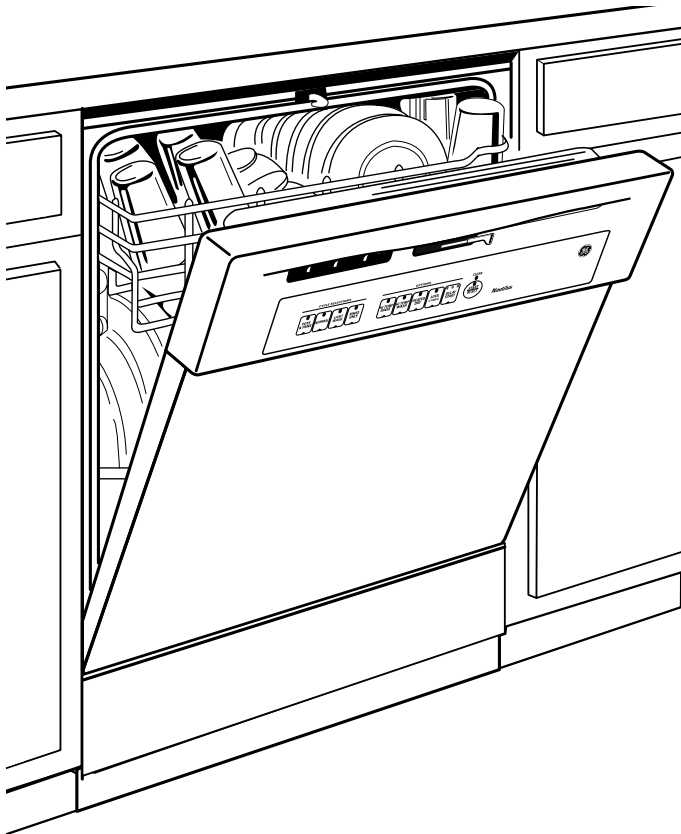

### **Features and Benefits**

- PowerScrub™ Wash System with Five Wash Levels
- Dual Filtration System
- Piranha™ Hard Food Disposer
- Electronic Controls
- Four Cycle Selections: Pots & Pans, Normal Wash, Light Wash and Rinse Only
- 26 Options including Child Lock, Hi-Temp Wash, Hi-Temp Rinse, Heated Dry and 4/6/8-Hour. Delay Start
- Deluxe Plus Upper Rack
- Deluxe Lower Rack
- Two Cup Shelves
- Deluxe Silverware Basket
- QuietPower™ I Sound Insulation Package
- QuietPower™ Motor
- Trimless Appearance
- Model GSD4500GWW - White on white
- Model GSD4500GCC - Bisque on bisque
- Model GSD4500GBB - Black on black