




Monogram™

## ZDP30L4YSS - GE Monogram™ 30" Free-Standing Professional Gas Range

### Dimensions and Specifications (in inches)

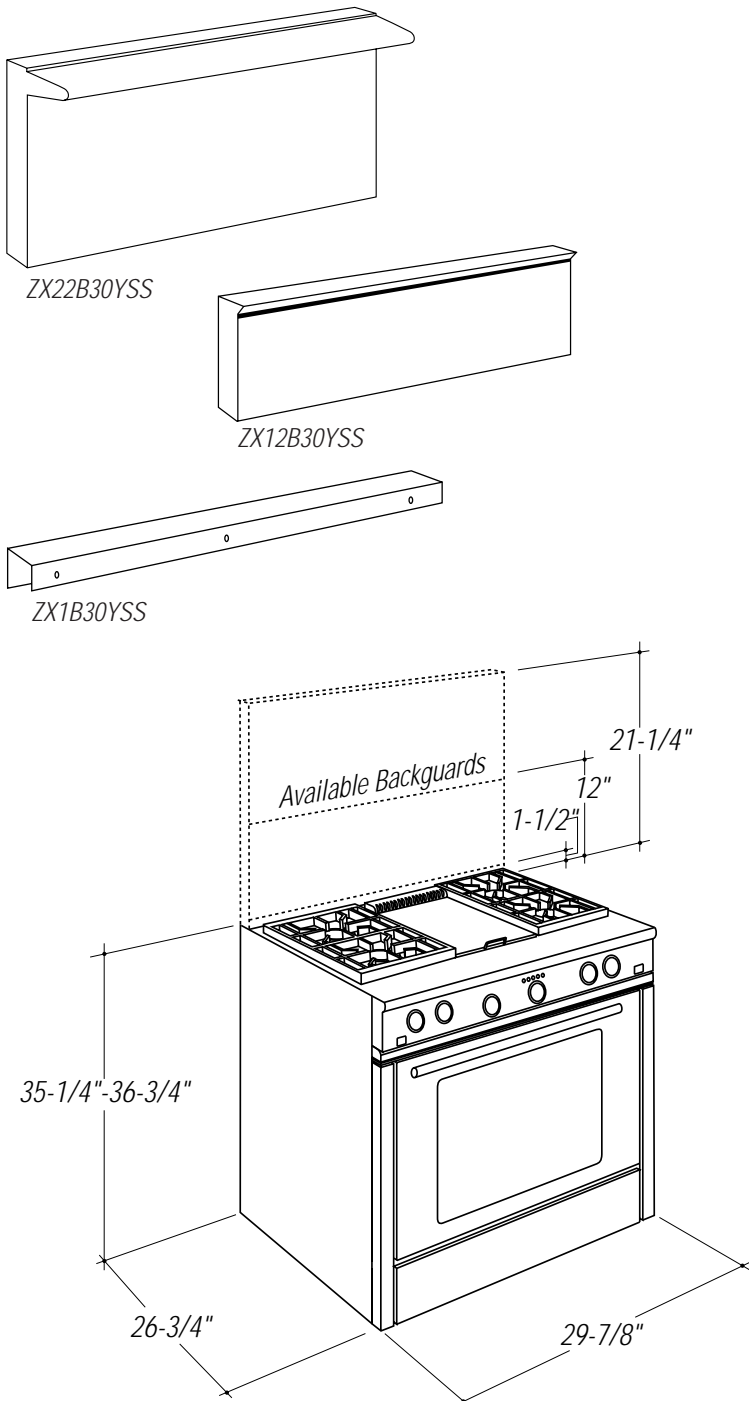

These ranges are factory set for either natural gas or liquid propane gas.

#### 30" Natural Gas Model:

ZDP30N4YSS—4 gas burners

#### 30" Liquid Propane Gas Model:

ZDP30L4YSS—4 gas burners

#### Accessory Requirements:

All models **require** the installation of a backguard. A backguard should be ordered at the same time as the range. Both must be on site at the time of installation.

#### Order one backguard for 30" models:

ZX1B30YSS—1-1/2" high backguard  
(required for island installations)

ZX12B30YSS—9" high backguard

ZX22B30YSS—22" high backguard with warming rack  
(2 piece)

#### Advance Planning:

Refer to dimensional drawings for appropriate placement and necessary clearances when planning the installation.

- Cabinetry cannot be installed directly above the range.
- This range requires the installation of a vent hood, 30" to 36" above the surface.
  - The vent hood must be at least 24" deep.
  - The vent hood must be the same width as the range.
  - The vent hood must provide at least 600 CFM and up to 800 CFM.
- Working areas adjacent to the range should have 18" minimum clearance between countertop and cabinet bottom.
- Clearance between range and side wall or combustible material must be at least 12" on each side.

For answers to your Monogram®, GE Profile Performance Series™, GE Profile™ or GE appliance questions, call GE Answer Center® service, 800.626.2000.




Listed by  
Underwriters  
Laboratories



Monogram™

## ZDP30L4YSS - GE Monogram™ 30" Free-Standing Professional Gas Range

### Dimensions and Specifications (in inches)

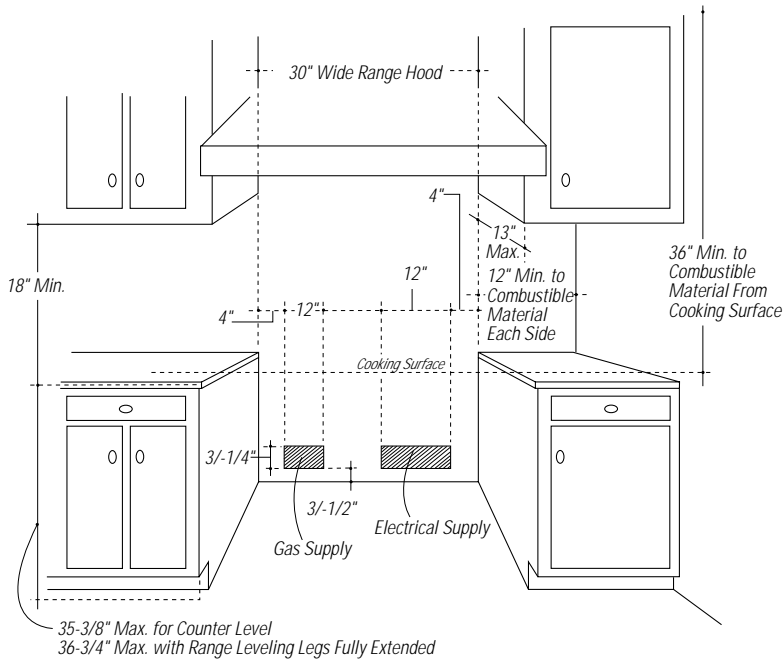


#### If the range is installed in an island:

- Allow 12" min. clearance at the back to combustible materials.
- Allow 36" min. above the cooking surface to combustible materials.
- The vent hood must provide at least 600 CFM and up to 1200 CFM.
- Installation must conform with local codes. In the absence of local codes, the range must comply with the National Fuel Gas Code, ANSI Z223.1-1990.

A.G.A. approved

#### Installation Information:

Before installing, consult installation instructions (Pub. #49-8786) packed with product for current dimensional data.

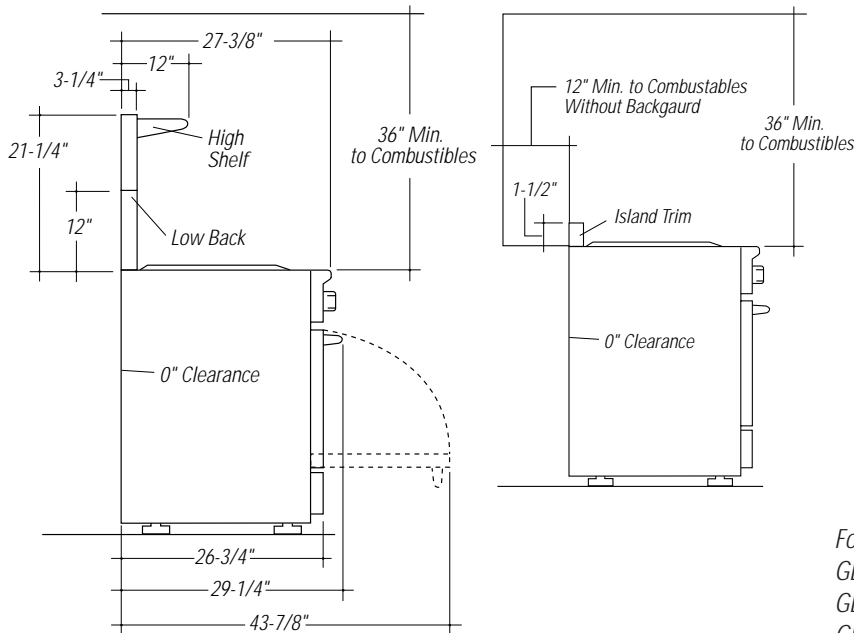

For answers to your Monogram®  
GE Profile Performance Series™  
GE Profile™ or GE appliance questions, call  
GE Answer Center® service, 800.626.2000.




Listed by  
Underwriters  
Laboratories



*Monogram™*

## **ZDP30L4YSS - GE Monogram™ 30" Free-Standing Professional Gas Range**

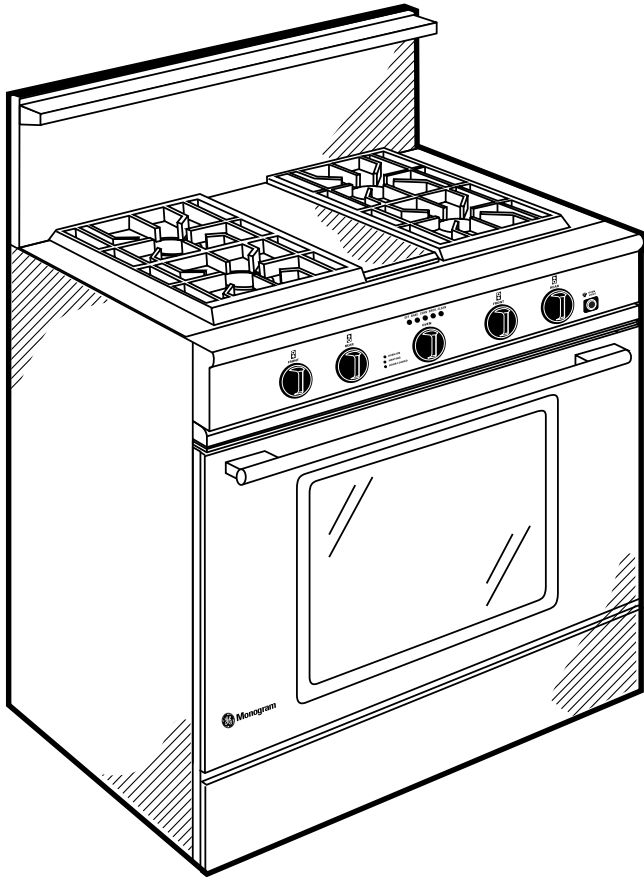

### **Features and Benefits**

- *Liquid Propane Gas*
- *Four (15,000/500 BTU) Dual-Ring Gas Burners*
- *Porcelainized, Cast-Iron Burner Grates*
- *Stainless Steel, Slide-Out Drip Tray*
- *Electronic Ignition with Automatic Reignition*
- *4.0 cu. ft Electric Convection Oven*
- *Self-Clean Oven*
- *Commercial-Style Controls*
- *Six-Pass Bake Element and Eight-Pass Broil Element*
- *Porcelain-Enameled Broiler Pan with Chrome-Plated Grid*
- *3 Oven Racks*
- *Stainless Steel Door with Window*
- *Tubular Stainless Steel Handle*
- *ZDP30N4YSS - Natural gas*
- *ZDP30L4YSS - Liquid propane gas*