Before you Begin – Read these instructions completely and carefully.

Note To Installer: Be sure to leave these instructions with the Consumer.

Note to Consumer: Keep these instructions with your Use and Care Book for future reference.

If you have questions concerning the installation of this product, call the GE Answer Center® Consumer Information Service at 800.626.2000, 24 hours a day, 7 days a week.

If you received a damaged Grill Cart, you should contact your dealer.


Assembly of this grill cart requires basic mechanical skills. Proper assembly is the responsibility of the installer.


NOTE:

The shelves must be installed on the cart before the grill is mounted and before any gas connections are

Step 1: Remove Open the box and remove the contents. Remove packaging and protective film from shelves.

Packaging

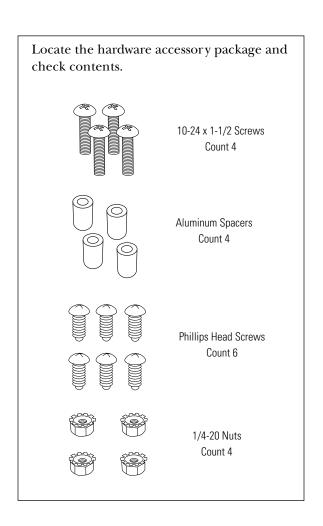

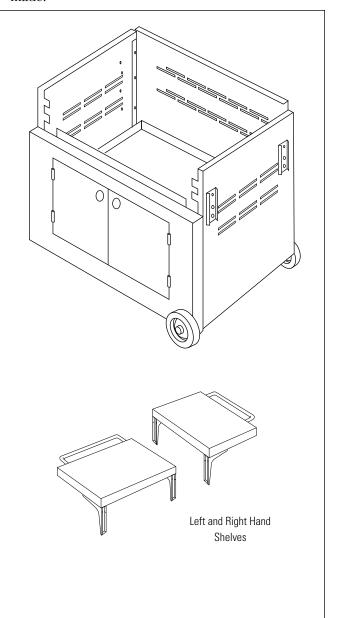

Installation


36" and 48" Grill Cart Assembly

Tools You Will Need


Step 2: Install Side Shelves

- 3/8" wrench or socket
- Phillips head screwdriver
- Gloves to protect against sharp edges


CAUTION: The grill is extremely heavy. 2 people are required to lift and place the grill onto the cart.




• Remove the top screw in the front shelf slide on the left and right sides. Retain screws. NOTE: One shelf is marked "R/H Shelf". Be sure to use that shelf on the right side of the cart.



• Slide shelf supports up and into the channels on the sides of the cart.



- When the shelf reaches stops at the top, fold the shelf out horizontally.
- The shelf should rest securely in the channels.
- Install the long 10-24 screws and spacers below the shelf supports. Secure with nuts on the inside of the cart. (2 on each side.)
- The spacers and screws will prevent the shelf from sliding out of the channels when folded down.



To fold the shelves down:

- Lift the shelf up until it clears the channels.
- Fold down and let the shelf slide down and stop on the spacers.
- Fold both shelves down.

Installation


36" and 48" Grill Cart Assembly

Step 3: Mount Grill on Assembled Cart CAUTION: Lock front caster on the cart to prevent movement.

See Installation instructions packed with the grill. Remove packaging, drip tray, smoker tray, burner grates and parts box.


CAUTION: The grill is extremely heavy. 2 people are required to lift and place the grill onto the cart.

- Carefully, lower the grill onto the cart. The grill should be behind the lip on the front of the cart.
- Check to be sure the grill rests securely and fits square on the cart. The screw holes at the front and back should be aligned.

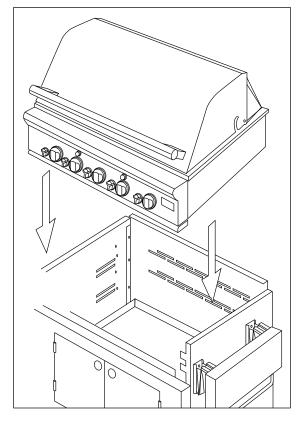

Step 4: Secure Grill to Cart

- Install 3 screws along the front and 3 screws along the back with a phillips head screwdriver.
- Re-install long screws previously removed in the top of each front slide.

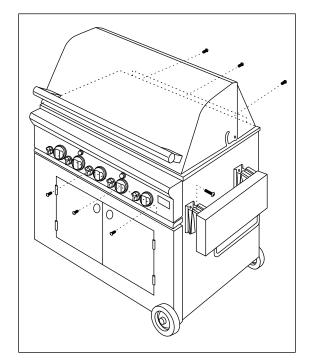

To obtain specific information concerning any Monogram product or service, call GE Answer Center® consumer information service at 800.626.2000—any time, day or night.

For Monogram local service in your area, call 1-800-444-1845.

NOTE: Product improvement is a continuing endeavor at General Electric. Therefore, materials, appearance and specifications are subject to change without notice.



Pub. No. 49-8841 Dwg. No. 164D3333P081 © 1997 GE Appliances (N.D. 723) 4/97