# GSD2300/2301N GE® Built-In Dishwasher


#### Dimensions and Installation Information (in inches)

#### **Electrical Rating**

Voltage AC	120
Hertz	60
Total connected load amperage	6.2
Calrod® heater watts max	500

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.




Hot

left

\*\* Adjustment required to match adjacent cabinet fronts due to leveling leg adjustment, 4" nominal

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



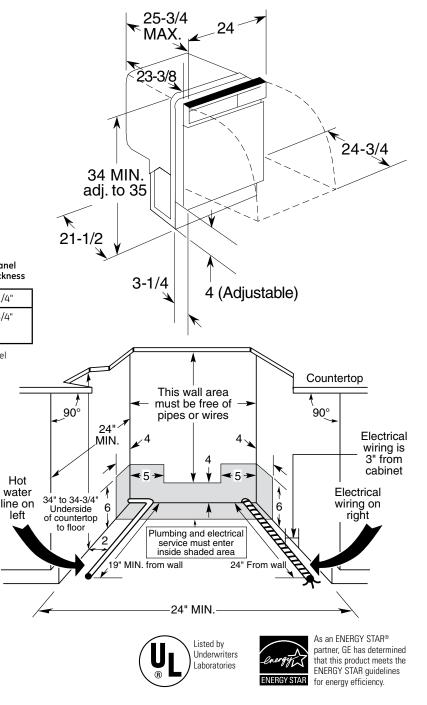

## GSD2300/2301N GE® Built-In Dishwasher

### **Features and Benefits**

- Meets 2007 ENERGY STAR® Criteria Can reduce utility bill by using less water to get dishes clean
- 4-level PowerScrub™ wash system Four wash levels quietly and efficiently scrub dishes clean
- HotStart™ Option Preheats water before the main wash cycle for dependable performance every time
- Piranha<sup>™</sup> Hard Food Disposer Grinds leftover food into small particles that are easily washed away
- Pots and Pans Cycle Scours off baked-on food with a wall of water
- Heated Dry Option Circulates warm air to quickly and gently dry dishes
- Plate Warmer cycle Gently warms dinner plates for serving food at the optimal temperature
- Model GSD2300NWW White on white
- Model GSD2300NCC Bisque on bisque
- Model GSD2300NBB Black on black
- Model GSD2301NWW White on white, has power cord attached

