

GE Appliances

GSD3455FCC—GE Nautilus™ Built-In Dishwasher

Built-In Dishwasher Dimensions (in inches)



Rough-In Installation Information (in inches)

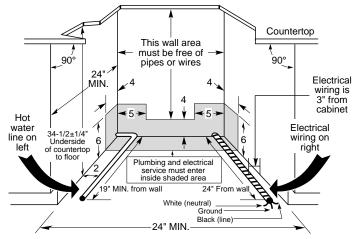


Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Electrical Rating

Voltage AC120				
Hertz60				
Total connected load amperage8.6				
Calrod® heater watts500				
For use on adequately wired 120-volt, 15-amp				
circuit having 2-wire service with a separate ground wire. This appliance must be grounded				

Wood Insert Cut-Out Dimensions (in inches)



Models/Kit	Α	В	C	D – Panei Thickness
GPF425 Kit	19-3/4"	23-9/16"	3-11/16"	1/4"
GPF475 Kit	19-7/8"	23-5/8"*	4-1/4" to 3-11/16"**	3/4"


- *Bottom of panel must be notched 1-1/2" x 1/2" to clear access panel. (See illustration above)
- **Adjustment required to match adjacent cabinet fronts due to leveling adjustment, 4" nominal.

For answers to your Monogram,® GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



GE Appliances

GSD3455FCC—GE Nautilus™ Built-In Dishwasher

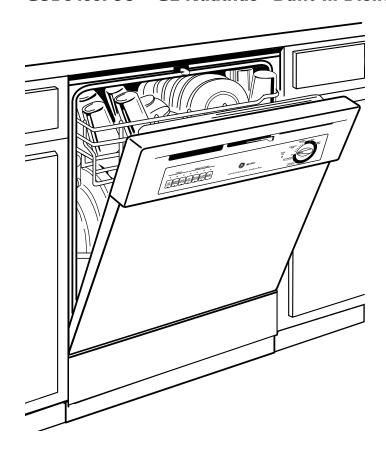

Features and Benefits

- PowerScrub™ Wash System with 5 Wash Levels
- Dual Filtration System
- Piranha™ Hard Food Disposer
- Dial & TopTouch™ Controls
- Deluxe Upper Rack
- Deluxe Lower Rack
- Deluxe Silverware Basket
- 6 Cycle / 31 Option Selections: Pots & Pans, Normal Wash, Light Wash, Short Wash, Plate Warmer and Rinse Only
- Options: Start/Reset, Delay Start (1-6 Hours), Heated Dry On/Off, Hi-Temp Wash and HotStart™
- Rinse Aid Dispenser
- QuietPower™ Motor
- QuietDesign™ Sound Insulation Package
- Trimless Appearance
- Model GSD3435FWW White on white
- Model GSD3425FBB Black on black
- Model GSD3415FAA Almond on almond
- Model GSD3455FCC Bisque