




Profile™

JVM1350SY—GE Profile™ SpacemakerXL Microwave Oven

Dimensions (in inches)

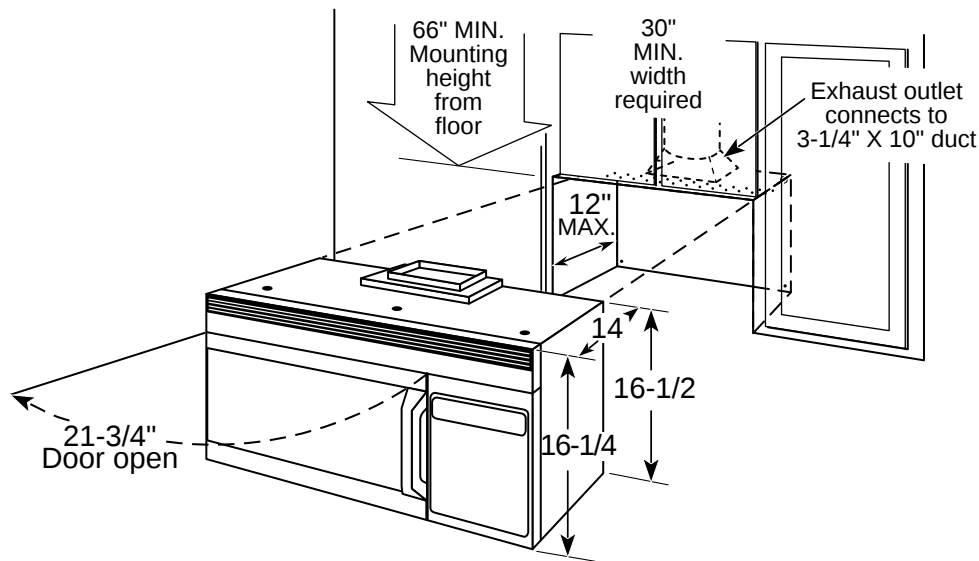

Note: Requires 120V grounded outlet. Electrical receptacle must be located in cabinet above SpacemakerXL microwave oven. No additional wiring, venting or cabinet rebuilding necessary in many cases. Complete detailed, easy-to-follow installation instructions and convenient full-size templates are packed with the SpacemakerXL microwave oven.

Important Information: When installing the SpacemakerXL microwave oven over a range, allow minimum of 2" from bottom of SpacemakerXL microwave oven to top of range backguard to allow for removal of light covers.

Ventilation Options: The SpacemakerXL microwave ovens are designed for adaptation to the following three types of ventilation:

- Outside exhaust (vertical—as shown)
- Outside exhaust (horizontal)
- Recirculating (non-vented ductless—see Filter Kit drawing)

Installation Information: This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

For answers to your Monogram®, GE Profile Performance Series™, GE Profile™, GE, Hotpoint and RCA appliance questions, call GE Answer Center® service, 800.626.2000.



Listed by
Underwriters
Laboratories




Profile™

JVM1350SY—GE Profile™ SpacemakerXL Microwave Oven

Optional Accessories (Available at additional cost)

Filler Panel Kits JX41—Black

When replacing a 36" or 42" range hood, this kit fills in the additional width to provide a custom, built-in appearance. For installation between cabinets only; not for end-of-cabinet installation. Each kit contains two, 3"-wide filler panels. Two kits are needed for a 42" opening.

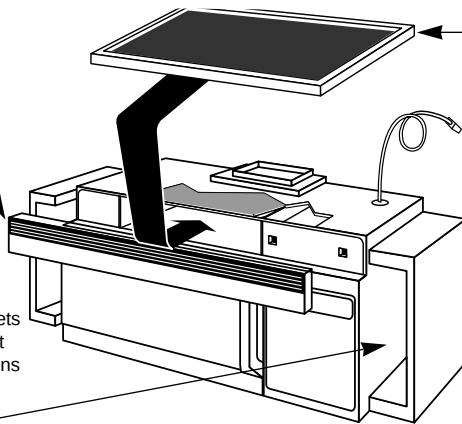

Filter Kits

JX81A—Recirculating Charcoal Filter Kit
To be used when the SpacemakerXL microwave oven cannot be vented to the outside.

JX22SS—Stainless Steel Decorative Panel Kit

When replacing a Hi/Low range with a SpacemakerXL microwave oven over a range model, this panel kit fills in the area between the microwave and range left by the Hi/Low model.

Optional Accessories	
Recirculating Charcoal Filter Kit	JX81A
Filler Panel Kit	JX41
Decorative Panel Kit	JX22SS

For answers to your Monogram®, GE Profile Performance Series™, GE Profile™, GE, Hotpoint and RCA appliance questions, call GE Answer Center® service, 800.626.2000.




Listed by
Underwriters
Laboratories



Profile™

JVM1350SY—GE Profile™ SpacemakerXL Microwave Oven

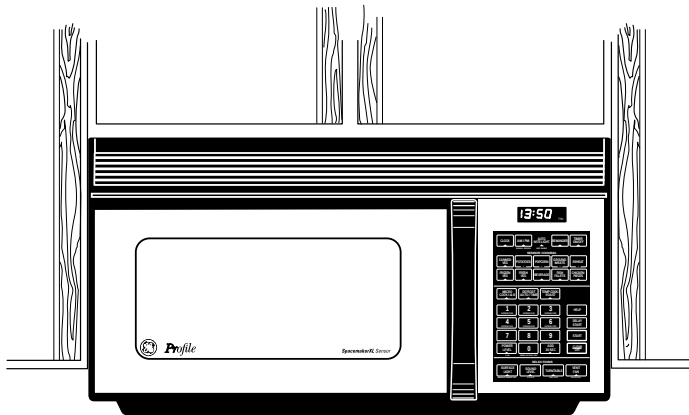

Features and Benefits

- 1.3 cu. ft. Oven Cavity
- 900 Watts*
- CircuWave™ Plus Cooking System
- SmartControl System With Interactive Display
- Sensor Cooking Controls For Popcorn, Beverage, Reheat, Ground Meats, Fish Fillets, Chicken Pieces, Potatoes and Three Vegetable Pads
- Add 30 Seconds
- Turntable On/Off
- Help Pad
- Instant On Controls
- Auto Defrost/Time Defrost
- Micro Cook I & II
- Temp Cook/Roast (Probe)
- Dual Rack
- Timer On/Off
- Programmable Nite Light
- Full-View Cooktop Lighting
- Model JVM1350WW—White on White
- Model JVM1350BW—Black on Black
- Model JVM1350AW—Almond on Almond
- Model JVM1350SY—Stainless Steel

*IEC-705 Test Procedure