



commercial laundry

GE® commercial washer and dryer 2006 product specifications



GECommerciaallaundry.com

Feature gallery

Heavy-duty commercial washer and dryer



PermaTuf® II basket

Resists peeling, chipping, rusting or flaking for long-term durability.



ArmorGuard protection

Provides a rust-resistant, durable finish to the washer top and lid.



Upfront lint filter

Easy to see and clean and is permanently installed to protect from vandalism.

Frontload commercial washer and dryer



Automatic water fill

Eliminates guesswork and water waste. Automatically adjusts to the load type by adding water. Water fill level remains below the door.



Automatic dispenser

Automatically dispenses detergent, bleach and fabric softener at just the right time in the wash cycle. Liquid or powder high-efficiency detergents can be used.

Smart card commercial washer and dryer



ESD smart card reader



Exclusive auto balance suspension system

Keeps the washer balanced even if the load is unbalanced.



Extra-wide dryer opening

Provides easy access to our 7.0 cu. ft. of total dryer capacity.

Non-coin commercial washer and dryer



Stainless steel basket

Durable, won't chip or peel and resists rust.



Auto balance suspension system

Virtually eliminates unbalanced loads.



Upfront lint filter

Easy to see and clean and is permanently installed to protect from vandalism.

Not all features available on all models.

Smart card commercial washer and dryer



WNCK2050D

GE® ESD smart card commercial washer

- 2.7 cu. ft. capacity
- 2-speed motor
- 5 wash cycles
- 3 wash/spin speed combinations
- 3 wash/rinse temperatures
- 4 water levels (adj.)
- Digital countdown cycle
- Color Cottons
- Bright Colors
- Permanent Press
- White Cottons
- Delicates
- Quiet Package
- Lid instructions
- LED indicators
- ESD Smart Card reader
- Alphanumeric display
- Control card



DNCK440EA/GA

GE ESD smart card commercial dryer

- 7.0 cu. ft. super capacity
- 4 dry cycles
- 4 heat selections
- Digital cycle countdown
- Super quiet performance
- Lockable lint filter
- Reverse-A-Door
- LED indicators
- ESD Smart Card reader
- Alphanumeric display
- Control card



3-Year limited parts warranty; 5-Year limited parts warranty on outer tub, inner basket, dryer drum and cabinet rust-through.

Limited parts only warranty, no labor warranty. See written warranty for details.


Non-coin commercial washer and dryer



WNRD2050D

GE super capacity plus commercial washer

- 3.5 cu. ft. capacity plus
- Stainless steel basket
- 2-speed motor
- 5 wash cycles
- Exclusive auto balance suspension system
- 4 water levels
- 3 wash/spin speed combinations
- 3 wash/rinse temperatures
- Spin only
- Digital cycle countdown
- LED indicators for fill, wash, rinse and final spin
- Bleach dispenser
- Fabric softener dispenser
- Deluxe Quiet Plus

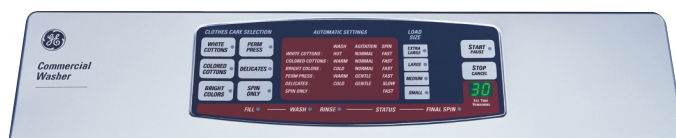


DNCD450EA/GA

GE super capacity commercial dryer

- 7.0 cu. ft. super capacity
- 5 dry cycles
- 4 temperatures
- Air dry
- Cycle countdown
- Hush Quiet package
- LED indicators for door open, drying, cool down, clean lint filter
- Lockable lint filters
- Reverse-A-Door



Vision impaired kit

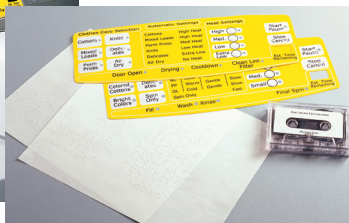


The GE commercial washer and dryer offers panel overlays for the washer and dryer and Braille instructions for placement on control panels. The kit also includes an audio cassette. The washer and dryer models (WNRD205D and DNCD450EA/GA) shown to the left demonstrate the overlays.

How to order a vision impaired kit:

To purchase Braille Kit, Part No. WX05X10007, call 800-626-2202, or go to www.geappliances.com, select Washers and Dryers, then Parts and Accessories.

1-Year limited parts and labor warranty.
See written warranty for details.

Heavy-duty commercial washers

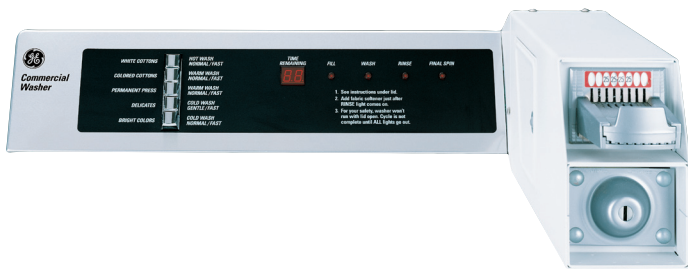

WCRD2050F

GE® super capacity commercial washer

- 3.5 cu. ft. capacity
- 2-speed motor
- Stainless steel basket
- 5 wash cycles
- 3 water levels (adjustable)
- 3 wash/rinse temperatures
- 2 wash/spin speed combinations
- 24-minute wash cycle
- Electronic cycle count-down
- 100% front serviceable

Coin mechanism sold separately.

WCCD2050F

Similar to WCRD2050F except has **ExtrAction™ basket** and **2.0 cu. ft. capacity**



WCCB1030F

GE single-speed commercial washer

- 3.2 cu. ft. capacity
- ExtrAction™ basket
- 3 wash cycles
- 3 water levels (adjustable)
- 3 wash/rinse temperatures
- 1 wash/spin speed combination
- 24-minute wash cycle
- 100% front serviceable

Coin mechanism sold separately.

Additional washer features/benefits

- 40% fewer parts on our top-loading machines than before for long-lasting performance—and there's less to go wrong.
- Over 40 pounds lighter than previous design for easier moving.
- 1/2 HP single-speed and two-speed motors with a single-speed clutch.
- Powerful turbo pump can pump up to an 8 foot standpipe. A wide impeller clearance reduces the chances of clogging.
- Quiet Brake eliminates most noise made by the basket when it stops spinning.
- Galvanized with e-coated base and cabinet for enhanced corrosion resistance.
- Stainless steel basket (WCRD2050F)

3-Year limited parts warranty; 5-Year limited parts warranty on outer tub, inner basket, dryer drum and cabinet rust-through.

Limited parts only warranty, no labor warranty. See written warranty for details.

Heavy-duty commercial dryers



DCCD330ED/GD (Electric/Gas)

GE super capacity commercial dryer

- 7.0 cu. ft. super capacity
- 3 cycles
- Electronic cycle countdown
- 3 heat selections

Coin mechanism sold separately.

DCCB330ED/GD (Electric/Gas)

- 7.0 cu. ft. super capacity
- 3 heat selections
- 3 cycles

Commercial laundry security features/benefits

- Washer and dryer tops can be locked to cabinet for added security (lock not provided).
- Threaded bolt in meter case engages a bracket on the main washer support and dryer wrapper to maximize the resistance to vandalism.
- Heavy-duty access door on meter case accommodates lock to guard timing mechanism.
- Thick steel meter case with security hood protects slide and vault areas.
- The large coin vault capacity prevents coins from piling up and affecting coin entry.
- Tamper-resistant lid switch.
- Security screws on all coin and electrical enclosures.

Additional dryer features/benefits

- Reduced energy consumption is achieved by pre-heating the incoming air and controlling it with a new, more responsive heat management system.
- DuraDrum™ provides a smooth and durable finish that wipes clean and offers protection for clothes.
- Heavy-duty 1/4 HP motor provides extra durability.
- New improved drying performance for user satisfaction.

3-Year limited parts warranty; 5-Year limited parts warranty on outer tub, inner basket, dryer drum and cabinet rust-through.
Limited parts only warranty, no labor warranty. See written warranty for details.

Heavy-duty stackable commercial dryers



DDC4400S/DDC4500S (Electric/Gas)

GE large capacity dryer

- 5.4 cu. ft. large capacity
- 3 cycles
- 3 heat selections
- Stacked pair
- "ON" indicator light
- 100% front serviceable
- Dryers shipped preassembled



Coin mechanism sold separately.

Frontload commercial washer and matching dryer



WCCH404FWW

GE frontload commercial washer

- 2.7 cu. ft. capacity
- ENERGY STAR®-qualified
- Reverse wash action
- Uses 40% less water and energy
- 3 wash temperatures/ 1 rinse temperature
- Automatic water level adjustment
- 4 wash cycles (Color Cottons, Permanent Press, White Cottons, Delicates)
- Stainless steel wash drum
- Detergent dispenser
- Fabric softener dispenser
- Bleach dispenser



DCCH43EF/GF (Electric/Gas)

GE frontload commercial dryer

- 5.7 cu. ft. extra-large capacity
- 3 dry cycles
- 3 heat selections
- Lockable lint filter
- Reversible door swing
- DuraDrum finish

FPDW1

Pedestal for use with frontload washer and dryer

Optional 12" pedestal raises the door opening and the height of the washer or dryer.


3-Year limited parts warranty; 5-Year limited parts warranty on outer tub, inner basket, dryer drum and cabinet rust-through.
Limited parts only warranty, no labor warranty. See written warranty for details.

Smart card commercial washer and dryer


GE washer	
WNCK2050D	
Capacity	
Capacity (cu. ft.)	Extra-large (2.7)
Features	
Motor speed	2
Wash/spin speed comb.	3
Wash/rinse temperatures	3
Water levels	Adjustable
Digital cycle countdown	●
Number of wash cycles	5
White cottons	●
Colored cottons	●
Bright colors	●
Permanent Press	●
Delicate	●
Quiet performance	●
Lid instructions	●
LED indicators	●
Smart Card features	
Reader	ESD
Alphanumeric display	●
Control card	●
Appearance	
Colors available	White
Control panel	Brushed aluminum/black/ burgundy
Weights & Dimensions	
Approx. shipping wt. (lbs.)	170

GE dryer	
DNCK440EA DNCK440GA	
Capacity	
Capacity (cu. ft.)	Super (7.0)
Features	
Heat selections	4
Dry cycles	4
High Heat	●
Medium Heat	●
Low Heat	●
Cool down	w/high heat
Digital cycle countdown	●
Quiet performance	●
Lockable lint filter	●
LED indicators	●
Door swing	Reversible
Drum finish	White DuraDrum
Smart Card features	
Reader	ESD
Alphanumeric display	●
Control card	●
Appearance	
Colors available	White
Control panel	Brushed aluminum/black/ burgundy
Weights & Dimensions	
Approx. ship. wt. (lbs.)	130
	Elect. 130
	Gas 125

Washer dimensions (in inches)

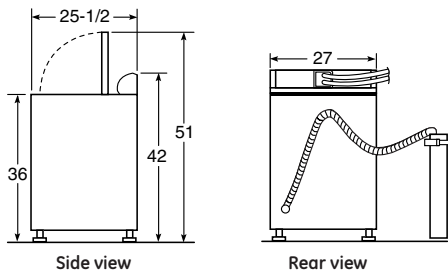

Dryer dimensions (in inches)

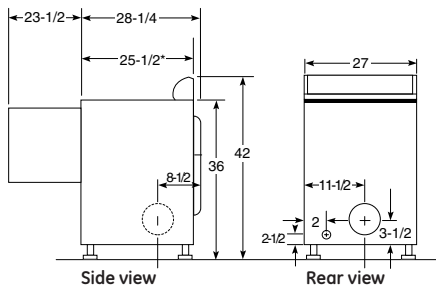

Non-coin commercial washer and dryer


GE washer	
WNRD2050D	
Capacity	
Capacity (cu. ft.)	3.5 stainless steel
Features	
Motor	2-speed
Wash/spin speed combinations	3
Wash/rinse temperatures	3
Water levels	4
Digital cycle countdown	●
Number of wash cycles	5
White cottons	●
Colored cottons	●
Bright colors	●
Permanent Press	●
Delicate	●
Spin only	●
Bleach dispenser	●
Fabric softener dispenser	●
Quiet performance	Deluxe quiet
Lid instructions	●
LED indicators	●
Appearance	
Colors available	White
Weights & Dimensions	
Approx. shipping wt. (lbs.)	160

GE dryer	
DNCD450EA DNCD450GA	
Capacity	
Capacity (cu. ft.)	Super (7.0)
Features	
Dry cycles	5
Cottons/high heat	●
Mixed loads/high heat	●
Perm. press/medium heat	●
Knits/low heat	●
Delicates/extra low heat	●
Temperatures	4
Air dry	●
Digital cycle countdown	●
Quiet performance	Hush quiet
Lockable lint filter	●
LED indicators	●
Door swing	Reversible
Drum material	White DuraDrum
Appearance	
Colors available	White
Weights & Dimensions	
Approx. shipping wt. (lbs.)	130
	Elect. 130
	Gas 125

Commercial washers and dryers

	GE washers		
	WCRD2050F	WCCD2050F	WCCB1030F
Capacity			
Capacity (cu. ft.)	3.5	3.2	3.2
Features			
Wash time (excludes fill)	24 min.	24 min.	24 min.
Water usage	29.32/35 gal.	29.32/35 gal.	29.32/35 gal.
Controls	Coin-op	Coin-op	Coin-op
Coin box/card reader	Box shipped attached	Box shipped attached	Box shipped attached
Coin slide/dropbox/card reader	Customer-supplied	Customer-supplied	Customer-supplied
Display	LED	LED	
Control type	Pushbutton w/ LED countdown	Pushbutton w/ LED countdown	Pushbutton
Cycle indicator lights	●	●	●
Washing features			
Wash/rinse temperatures	3	3	3
Wash/spin speed combinations	2	2	1
Motor speeds	2	2	1
Water levels	3 - adjustable	3 - adjustable	3 - adjustable
Agitator type	GentlePower™	GentlePower	GentlePower
Wash basket type	Stainless steel	ExtrAction™	ExtrAction
Number of wash cycles	5	5	3
Cycles			
Whites/cotton regular	●	●	●
Colors/cotton	●	●	
Bright colors	●	●	
Permanent press	●	●	●
Delicates cycle	●	●	●
Unit features			
Color lid instructions	●	●	●
Lid opening	Rear	Rear	Rear
100% front serviceable	●	●	●
Armor guard protection	●	●	●
Steel drive transmission	●	●	●
Galvanized/E-coated steel	●	●	●
Auto balance suspension system	●	●	●
Spin speeds	630 RPM	630 RPM	630 RPM
Front leveling legs/rear self leveling system	●	●	●
Drain pump	TURBO 8-ft	TURBO 8-ft	TURBO 8-ft
Appearance			
Colors available	White	White	White
Weights & Dimensions			
Approx. shipping weight (lbs.)	190	174	174
Dimensions (HxWxD in inches)	42 x 27 x 25-1/2		

Washer dimensions (in inches)



Energy saving:

All wash cycles include energy-saving cold water rinse. Total cycle time—24 minutes plus fill time. Actual wash time is 8 minutes with a final spin speed of approximately 630 RPM.

Circuit requirement:

An individual, properly grounded 15- or 20-amp branch circuit is required.

Electrical rating:


115V, 60Hz

See Pub. No. 31-15400 for installation instructions.

Note: Coin slide or coin drop, coin vault, and locks for cover and meter case access door are not provided with washer.

	GE Dryers	
	Electric	Gas
	DCCD330ED	DCCB330ED
	DCCD330GD	DCCB330GD
Capacity		
Capacity (cu. ft.)	Super Plus (7.0)	Super Plus (7.0)
Features		
Control	Coin-op	Coin-op
Coin box/card reader	Box shipped attached	Box shipped attached
Coin slide/drop box/card reader	Customer-supplied	Customer-supplied
Display	LED	
Control type	Pushbutton w/LED count down	Pushbutton
Cycle indicator lights	●	●
Heating features		
Heats	3	3
Lint filter	Upfront	Upfront
Dryer baffles/paddles	Plastic	Plastic
Dryer drum type	Painted	Painted
Number of dry cycles	3	3
Cycles		
Whites/cottons/mixed loads	●	●
Knits/synthetics/delicates cycle	●	●
Permanent press	●	●
Unit features		
Quiet package	Quiet-By-Design	Quiet-By-Design™
Door opening	Reversible	Reversible
100% front serviceable	●	●
Armor guard protection	●	●
Galvanized steel cabinet	●	●
Leveling system	4-leg adjustable	4-leg adjustable
Electric-vent positions	4 way-rear, bottom, left, right	4 way-rear, bottom, left, right
	3 way-rear, bottom & left viewed from front	3 way-rear, bottom & left viewed from front
Gas requirements		
Gas rate	22000 BTU/Hr	22000 BTU/Hr
Type	Natural gas	Natural gas
Options	LP kit available	LP kit available
Ignition	Glo-Bar	Glo-Bar
Appearance		
Colors available	White	White
Weights & Dimensions		
Approx. shipping wt. electric (lbs.)	125	125
Approx. shipping wt. gas (lbs.)	135	135
Dimensions (HxWxD in inches)	42 x 27 x 25-1/2	

Dryer dimensions (in inches)



Exhaust options:

Electric: 4-way venting: left, right, bottom and rear. Maximum recommended exhaust duct length is 45 feet of 4" rigid ducting with two 90° elbows and 4" dampered wall cap.

Gas: 3-way venting: left, bottom and rear. Maximum recommended exhaust duct length is 15 feet of 4" rigid ducting with two 90° elbows and a dampered wall cap.

Dryer is shipped with exhaust to the rear.

(See Installation Instructions.)

See Pub. No. 31-1746 for installation instructions.

Circuit requirements:

Electric An individual branch circuit fused for 30 amps is required for each dryer.

Electric dryer rating:

240V, 60Hz, 5600W, 24A

208V, 60Hz, 4400W, 22A

Gas: An individual branch circuit fused for 15 or 20 amps is required for each dryer.

Gas dryer rating: 120V, 60Hz

Gas (BTU/Hr): 20,000. Factory equipped for natural gas. Tested for LP gas. A conversion kit is required for LP gas. Check installation instructions for correct kit number. Have a qualified technician install

the conversion kit. Equipped with energy saving Glo-Bar ignition.

Dryer note: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

Note: Dimensions and specifications shown here are correct at the time this sheet was printed. Before proceeding with construction or rough-in, check installation instructions that came with your unit. Specifications, dimensions and design are subject to change without notice.

Stacked commercial dryers

		GE dryers	
	Electric	DDC4400S	
	Gas	DDC4500S	
Capacity			
Capacity (cu. ft.)		Large (5.4)	
Features			
Automatic Dry Control		●	
Upfront lint filter		●	
Heat selections		3	
Number of cycles		3	
Cottons		●	
Permanent Press		●	
Delicates/Synthetic/Knits		●	
100% front serviceable		●	
Reverse-A-Door		●	
Heavy-duty 1/4 HP motor		●	
Appearance			
Colors available		White	
Weight & Dimensions			
Approx. shipping		Electric	
wt. (lbs.)		275	
		Gas	
		274	
Stacked (HxWxD in inches)		77 x 27 x 27	
Note: Coin accessories must be ordered separately from supplier.			

Exhaust options:

Electric: 3-way venting: left, right, or rear. Maximum recommended exhaust duct length is 25 feet of 4" rigid ducting with two 90° elbows and 4" dampered wall cap. **Gas:** 2-way venting: left or rear. Maximum recommended exhaust duct length is 15 feet of 4" rigid ducting with two 90° elbows and a dampered wall cap. Dryer is shipped with exhaust to the rear. (See Installation Instructions.)

Circuit requirements:

Electric: An individual branch circuit fused for 30 amps is required for each dryer.

Electric dryer rating:

240V, 60Hz, 5600W, 24A
208V, 60Hz, 4400W, 22A
A special 208-volt heater, part number WE11X0101, is available to reduce drying time in 208-volt installations.

Gas: An individual branch circuit, properly grounded for a 3-prong outlet, fused for 15 or 20 amp, is required for each dryer.

Gas dryer rating: 115V, 60Hz



Gas (BTU/Hr): Maintains thermostatically controlled heat flow to dry clothes gently. Longer cool-down period on Permanent Press cycle helps prevent heat-set wrinkles. Separate thermostat controls lower temperatures for Knit cycle drying. Factory equipped for natural gas. Tested for LP gas. A conversion kit, WE25X0217, is required for LP gas. Check installation instructions for correct kit number. Have a qualified technician install the conversion kit.

See Pub. No. 31-1723 for DDC4400S and Pub. No. 31-1724 for DDC4500S installation instructions.

Note: Dimensions and specifications shown here are correct at the time this sheet was printed. Before proceeding with construction or rough-in, check installation instructions that came with your unit. Specifications, dimensions and design are subject to change without notice.

Note: Wall anchor chain provided for gas models only.

Dimensions (in inches)

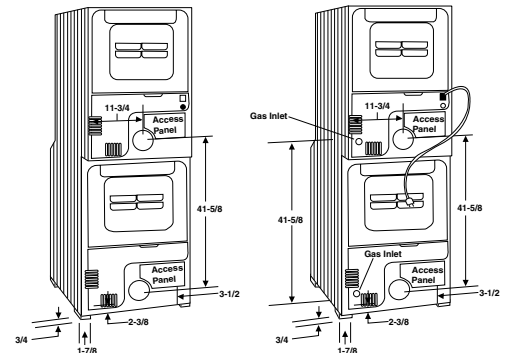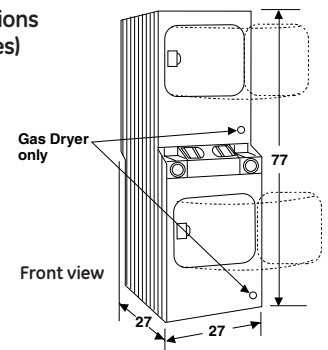


DDC4400S Back view

DDC4500S Back view


Frontload commercial washer

	GE
	WCCH404FWW
Capacity	
Capacity (cu. ft.)	16 pound (2.7–3.1 per IEC)
Features	
Efficiency	ENERGY STAR® -rated
Reverse wash action	●
Total water usage	Approx. 25 gallons maximum
Wash/rinse temp.	3/1
Automatic water levels	●
Wash program	Standard wash + 3 rinses (26 min., excl. fill times)
Wash options	
Color Cottons	●
Permanent Press	●
White Cottons	●
Delicates	●
Extraction	850rpm/210 G's
Automatic dispensing opt.	Detergent, liquid bleach, fabric softener
Suspension	Soft Mount
Drain pump	13 gpm @ 36 in head
Leveling system	Front leveling legs/rear rollers
Wash basket	Stainless steel
Door style	Glass
Pedestal available at additional cost	FPDW1 (12"H x 27"Wx24-3/8"D)
Appearance	
Colors available	White
Control panel	Brushed alum./black/burgundy
Weights & Dimensions	
Dimensions (HxWxD inches)	36 x 26-3/4 x 24-3/4 (without coin box)
Approx. shipping weight (lbs.)	217
Power Ratings	
Electrical requirements	120v, 60hz, 12.0 amps

Washer dimensions (in inches)



Side view




Rear view

Frontload commercial dryer

	GE®	
	Electric	Gas
	DCCH43EF	DCCH43GF
Capacity	Extra-large (5.7)	
Capacity (cu. ft.)	Extra-large (5.7)	
Features		
Heat selections	3	
Dry cycles	3	
High Heat	●	
Medium Heat	●	
Low Heat	●	
Lockable lint filter	●	
Door swing	Reversible	
Drum finish	White DuraDrum™	
Front serviceable	●	
Pedestal available at additional cost	FPDW1 (12"H x 27"W x 24-3/8"D)	
Appearance		
Colors available	White	
Control panel	Brushed alum./black/burgundy	
Weights & Dimensions		
Approx. shipping weight (lbs.)	Elect.	116
	Gas	116

Dryer dimensions (in inches)

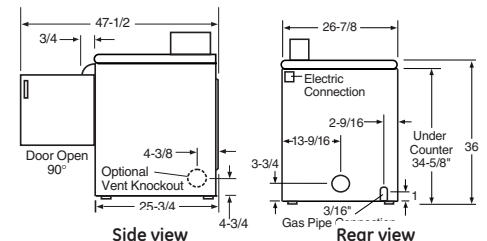

Side view

Rear view

GE® commercial laundry

Offering the best value with innovative features, benefits and durability!



GE exclusive features

- ArmorGuard protection—Tested rust-resistant durable finish. No rust or chips.
- E-coated base cabinet for enhanced rust resistance.
- PermaTuf® II basket—No rust. No chipping.
- Auto balance suspension system—Virtually eliminates off-balanced loads. Featuring the innovative floating suspension system and balance ring.
- 3 adjustable water levels
- 24-minute wash cycle—24 minutes plus fill time.
- 100% front serviceable—All operational parts can be serviced without moving the units.
- Tamper-resistant lid switch—Helps eliminate vandalized lid switches.
- Plus smart card capability—Accessory kit designed exclusively for GE.



Listed by
Underwriters Laboratories

GE Answer Center® saves you time.

800.626.2000

We Never Close!

- Any hour of the day or night—even on weekends and holidays—the GE Answer Center® service is available to answer questions about Monogram®, GE Profile Performance Series™, GE Profile™, GE® and Hotpoint® features and installations.
- You and your customers can call toll-free before, during and after the sale.

GE Sales Support

800.861.7206

GE Genuine Parts

800.626.2002

When You Want Parts To Fix It Yourself!

- We offer a complete line of parts, accessories and appliance care products for GE appliances and most other major brands too!
- Fast, convenient delivery direct to you.

To learn more about GE commercial laundry:

Go to **www.gecommerciallaundry.com**, or contact one of the support centers listed below.

Sales support	800.861.7206
Technical questions	480.379.3151
Parts fax number	866.841.9442
ESD	800.523.1510
Greenwald	800.221.0982



A Century of Quality and Innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.

GE Consumer & Industrial

Appliances
General Electric Company
Louisville, KY 40225
ge.com

Before purchasing an ENERGY STAR®-qualified appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your retailer or at ge.com.

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2006 GE Company
Pub. No. 14-S125 PC43796