

# STANDARD HIGHWALL



Job Name:	Approval:	
Purchaser:	Date:	
Submitted To:	Submitted By:	
Construction:	Unit:	
Reference:	Drawing #:	

## **GS07WB2BEA**



#### **Indoor Accessories**

Remote Controller (Included)	WJ26X35395
Wired Controller	GACT17B
Refrigerant Detection Sensor (RDS)	UALS01A

## **Specifications**


Cooling	Rated Cooling Capacity Btu/hr	7,000
Heating	Rated Heating Capacity Btu/hr	8,000
Power	Voltage, Cycle, Phase V/Hz/Phase	208-230/60/1
	Operating Voltage Range	187-253 VAC
Indoor Uni <b>t</b>	Fan Speed Stages	5 + Auto
	Airflow CFM: Cooling (Turbo/High/Med/Low/Quiet)	360/290/260/230/210
	Motor Speed RPM: Cooling (Turbo/High/Med/Low/Quiet)	1250/1050/950/850/750
	Indoor Sound Level dB: Cooling (Turbo/High/Med/Low/Quiet)	44/38/35/32/27
	Airflow CFM: Heating (Turbo/High/Med/Low/Quiet)	350/290/250/220/200
	Motor Speed RPM: Heating (Turbo/High/Med/Low/Quiet)	1200/1020/895/770/700
	Indoor Sound Level dB: Heating (Turbo/High/Med/Low/Quiet)	42/36/32/28/26
	Auto Up-Down Louver	Yes
	Auto Left-Right Louver	No
	Dimension: H x W x D in (mm)	11 7/8 x 34 1/4 x 7 3/4 (301 x 870 x 196)
	Weight (Net/Ship)- lbs (kg)	21.62/26.7 (9.8/12.1)
	Drain Pipe Size O.D in	5/8
	<b>Ş</b> WiFi*	Built-in
	Factory-Installed Refrigerant Detection Sensor (RDS)	No
	Refrigerant Detection Sensor (RDS) Compatible	Yes
Refrigerant Line	Liquid O.D. in	1/4
	Suction O.D. in	3/8


 ${}^*WiFi\,includes\,SmartHQ^{{\scriptscriptstyle\mathsf{TM}}}\,Home\,and\,SmartHQ^{{\scriptscriptstyle\mathsf{TM}}}\,Service\,compatibility.$ 






### **GS07WB2BEA**

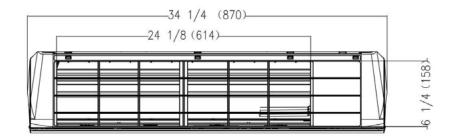



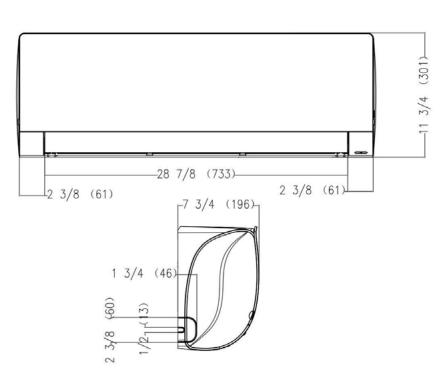

Note: Dimensions are shown in inches (millimeters)

#### SUBMITTAL REVISION HISTORY

03-31-25: Submittal release.

**04-21-25:** Updates: heating & cooling CFM; cooling sound level; weight.



