




Profile™

JD968BF/KF/SF/TF – GE Profile™ 30" Drop-In Electric Range

Dimensions (in inches)

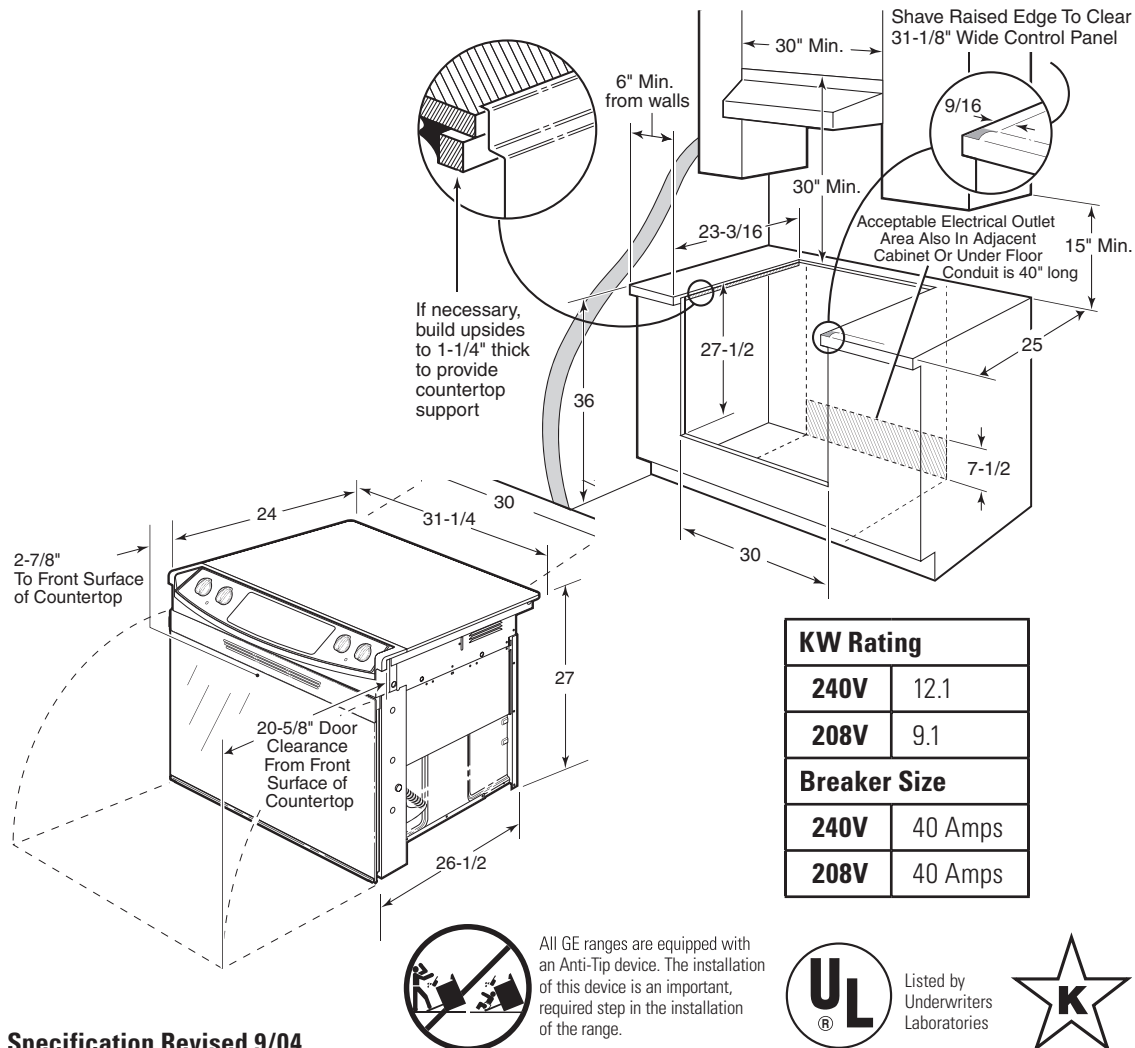

KW Rating	
240V	12.1
208V	9.1
Breaker Size	
240V	40 Amps
208V	40 Amps



Listed by
Underwriters
Laboratories



Optional Kits For Drop-In Electric Ranges

(Available At Additional Cost)

Maintop Filler

(Fills gap between cooktop and wall when unit is installed in 30" free-standing cutout)

JXS66WW—White
JXS66CC—Bisque
JXS66BB—Black

Accessory Backguards

(Attaches to the back of range as a backguard when unit is installed in 30" free-standing cutout)

JXS37WW—White
JXS37CC—Bisque
JXS37BB—Black/Stainless

Lower Trim Kits

(When a drop-in is installed in an existing cutout greater than 27-1/4" from the counter to the cabinet cross-rail, a lower trim kit should be used to fill the gap at the bottom of the range)

JXS96WW—White
JXS96CC—Bisque

Note: Cabinets installed adjacent to drop-in electric ranges must have an adhesion spec of at least a 194°F temperature rating.

Note: All 30" Drop-In Radiant Ranges conform to U.L. requirements for 0" spacing from range to adjacent walls below countertop. To reduce possibility of scorching the side walls above the countertop when no load is present on burners, it is recommended that a minimum 6" spacing from adjacent side wall be allowed for possible extended high-heat element operation.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

IMPORTANT: 30" DROP-IN RANGES ARE DESIGNED TO HANG FROM THE COUNTERTOP. IT DOES NOT REST ON THE FLOOR. FOR INSTALLATION ALTERNATIVES, REFER TO INSTALLATION INSTRUCTIONS PACKED WITH PRODUCT.

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.


Specification Revised 9/04

220822



Profile™

JD968BF/KF/SF/TF – GE Profile™ 30" Drop-In Electric Range

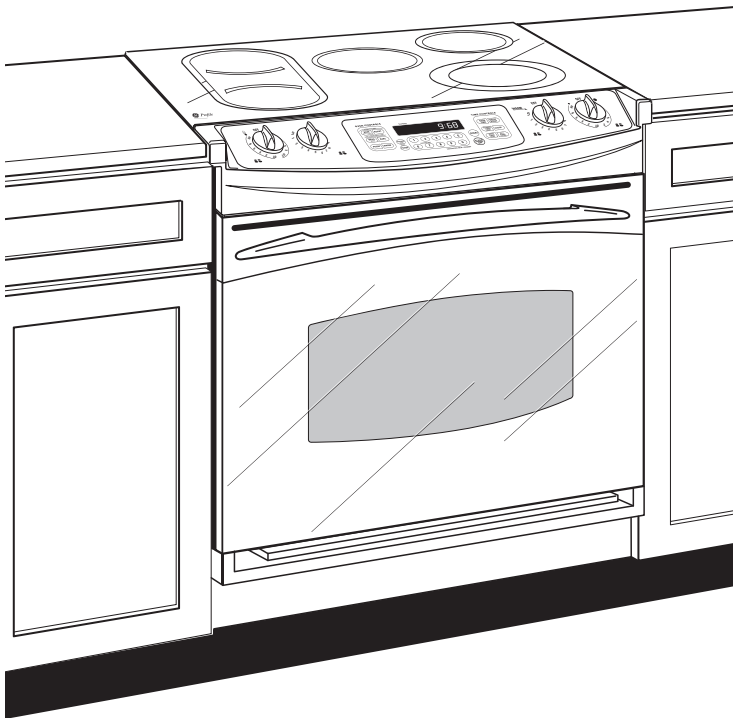

Features and Benefits

- Convection Self-Cleaning Super Large Capacity Oven with Automatic Oven Door Lock
- Precise Air™ Convection System
- Multi-Mode Convection Bake and Convection Roast
- True Frameless Oven Door with Big ClearView™ Window and Halogen Interior Light
- One 6", Two 7" Ribbon Heating Elements (with Bridge Element), One Dual 6"/9" Element and Fifth Element Warming Zone
- TrueTemp™ System
- SmartSet Electronic Glass Touch Oven Controls
- Certified Sabbath Mode/Proofing Mode
- 3 Heavy-Duty Oven Shelves
- Custom Built-In Look with Simple Drop-In Installation
- Model JD968BFBB – Black on black
- Model JD968KFCC – True bisque
- Model JD968TFWW – True white
- Model JD968SFSS – Stainless steel