

SPECIFICATIONS

JI LCII ICATIONS	
Overall Width	29 3/4" (75.6 cm)
Overall Height	53" (134.6 cm)
Overall Depth Including Handle	27 15/16" (71.0 cm) Upper oven 27 1/2" (69.9 cm) Lower oven
Oven Door Clearance	16 1/4" (41.3 cm) Upper oven 20 9/16" (52.3 cm) Upper oven
Overall Oven Interior Capacity	10.0 cu. ft. (283.2 liters)
Oven Interior Dimensions (W x H x D)	25" x 17 3/8" x 20 1/4" (63.5 cm x 44.1 cm x 51.4 cm)
Minimum Cabinet Width	30" (76.2 cm)
Minimum Cabinet Depth	24" (61.0 cm)
Minimum Base Support	400 lbs (181 kg)
Cutout Width	28 1/2" (72.4 cm) Min 28 5/8" (72.7 cm) Max
Cutout Height	51 13/16" (131.6 cm) Min 51 15/16" (131.9 cm) Max
Cutout Depth	23 1/2" (59.7 cm) Min
Volts/Hertz/Amps	240/208 V AC, 60 Hz, 40A
Conduit Length	40" (72" available special order: WB18T10398)
Electrical Rating	6.8 kW at 208V 9.0 kW at 240V
Shipping Weight	390 lbs (178 kg)


ATTENTION ELECTRICIAN:


A 240/208V, 60Hz, 20 Amp circuit is required. An individual properly grounded branch circuit or circuit breaker is required. Hardware junction box is required for built-in product.

ELEVATE EVERYTHING

MONOGRAM


OVERALL DIMENSIONS

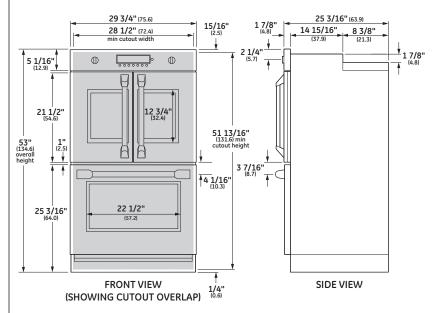




Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

WALL INSTALLATION

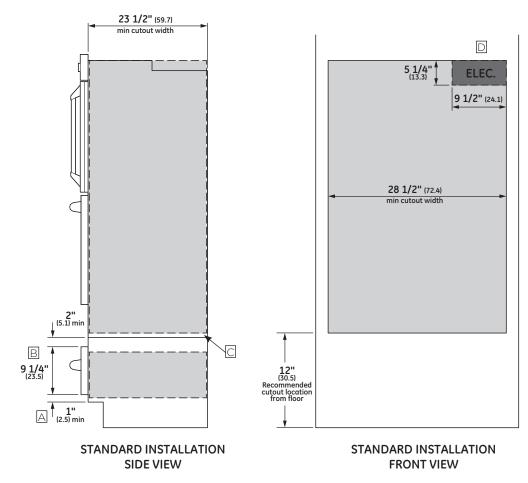

INSTALLATION TO ADJACENT COUNTERTOP

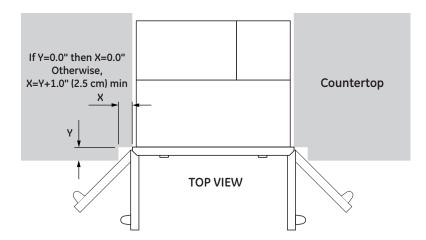

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

ELEVATE EVERYTHING



NOTES

- A Based on user height of 5'6" to 5'10"
- B Dimensions per Warming Drawer requirements.
- Platform must be able to support 400 lbs. (181 kg)
- Junction box location (May also be located in adjacent cabinet.)

FEATURES AND BENEFITS

FRENCH DOOR DESIGN

Inspired by commercial kitchen designs, the precision engineered chain-drive mechanism allows for onehanded opening of both oven doors at the same time

TRUE EUROPEAN CONVECTION WITH DIRECT AIR Channels heated air from the top of the oven and circulates it around food on all sides for perfectly uniform baking and roasting

10.0 CUBIC FOOT OVEN CAPACITY (5.0 EACH OVEN) Easily accommodates even the largest meals

SELF-CLEAN WITH STEAM CLEAN OPTION Gives you flexible options for thorough oven cleaning

EXCLUSIVE SELF-CLEAN, (2 FULL-EXTENSION, 1 REGULAR) OVEN RACKS

Glide in and out smoothly on stainless steel ball bearings, and are designed to be left in the oven during the self-clean cycle

WIFI CONNECT

Allows you to control oven functions from anywhere inside or even outside your home, using your smartphone or other web-enabled mobile device

STAINLESS STEEL BACK-LIT DIGITAL CONTROL KNOBS

Rotate with smooth precision. An indicator light in each knob makes it easy to view and select heat settings

THEATRE-STYLE LED OVEN LIGHTING

Located on both sides of the oven to enhance visibility and provide a clear view of food, regardless of rack position

TEN-PASS DUAL BROIL ELEMENT Evenly browns dishes of all types and sizes

TEN-PASS HIDDEN BAKE ELEMENT Assures even baking, while maximizing interior capacity and allowing easy cleaning

HAND-FINISHED EDGES

Reflect the meticulous quality and craftsmanship for which Monogram products are renowned



ELEVATE EVERYTHING"



