JKP70DP GE® 27" Built-In Single Convection Wall Oven

Dimensions and Installation Information (in inches)

KW Rating	
240V	3.4
208V	2.6
Breaker Size	
240V	20 Amps
208V	20 Amps

Note: These ovens are not approved for stackable or side-by-side installations.

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Note: For 27" built-in single ovens, if marks, blemishes or the cutout opening is visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

Note: Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

For answers to your Monogram[®] or GE[®] appliance questions, visit our website at geappliances.com or call GE Answer Center[®] service, 800.626.2000.




Cabinet	27"
A – Cabinet width required	27" min.
B - Minimum cabinet depth	23-1/2"
C – Opening width	25" min 25-1/4" max
D – Opening height	27-5/8" min 28-1/8" max
Dven	
E – Overall depth*	23-5/8"
F – Overall height with trim	29-7/8" - 30-3/4"
Overall height without trim	29"
G – Overall width	26-5/8

Suitable bracing to support


runners





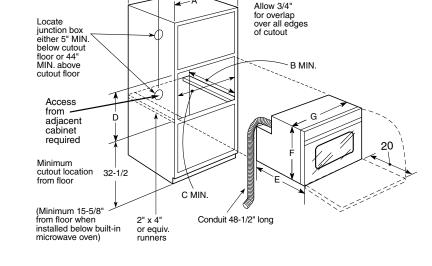

-10--




2" x 4" or equivalent

runners


JKP70DP GE® 27" Built-In Single Convection Wall Oven

Undercounter Installation Dimensions


Gas or electric cooktops may be installed over this oven. See cooktop installation instructions for cutout size. See label on top of oven for approved cooktop models.

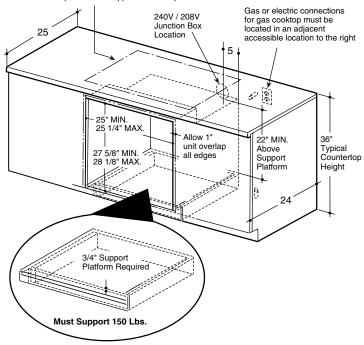

Sealed Burner Gas Cooktop Installation Dimensions



Standard Burner Gas Cooktop Installation Dimensions



Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Note: Oven is rated for use only under 30" standard or sealed burner gas and selected 30" CleanDesign and Calrod[®] electric cooktops.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

For answers to your Monogram[®] or GE[®] appliance questions, visit our website at geappliances.com or call GE Answer Center[®] service, 800.626.2000.







JKP70DP GE® 27" Built-In Single Convection Wall Oven

Features and Benefits

- Convection System A reversing fan circulates heat and air for evenly browned and baked foods
- Glass Touch Oven Controls Feature a smooth glass design that is both easy-to-operate and easy-to-clean
- Convection Bake (Multi-Mode) Offers three specialized modes for different cooking needs: single-rack convection baking, multi-rack convection baking and convection roasting
- Convection Roast Optimal for larger cuts of meat, this setting rotates the heat around all sides, sealing in the juices, producing rotisserie results at up to 25% faster than a conventional oven
- Flat Convection Cover Convection fan system is only 1" deep to provide additional room for cookware
- Eight-pass Bake Element Interior heating element loops eight times to distribute heat quickly and evenly for optimal baking results
- 6-Pass Broil Element Provides better and more even coverage of the food on the broiler pan
- Hidden Bake oven Interior Conceals the lower oven bake element to eliminate hard-toreach areas that collect food and spills for easy cleaning
- Heavy-duty Oven Racks Tough, durable racks include 50% thicker cross bars for extra strength
- Model JKP70DPBB Black on black
- Model JKP70DPWW White on white

